

xhalo



EN

Recessed light fittings, adjustable, for LED bulbs, PAR16, GU10 (HA01 with BX-QPAR16) and AR111, G53 (HA02 with BX-QR111).

The model HA01 can be equipped with LED modules from XCOMBO range CM03, CM07 and CM08 and HA02 with LED modules PrevaLED COIN 111, OSRAM and XCOMBO, CM09.

Housing of die cast aluminum, electrostatically painted.

Range of applications

Commercial lighting, general interior lighting.

Lamps and LED modules are not included.

RO

Corpuri de iluminat orientabile încastrate în plafon fals, pentru becuri cu LED-uri tip PAR16, GU10 (HA01 cu BX-Q-PAR16) și AR111, G53 (HA02 cu BX-QR111).

Modelul HA01 poate fi echipat cu module cu LED-uri din gama XCOMBO, CM03, CM07 și CM08, iar HA02 poate fi echipat cu module PrevaLED COIN 111, OSRAM și XCOMBO, CM09.

Corp din aluminiu turnat, vopsit în câmp electrostatic.

Dulii GU10 pentru HA01 și G53 pentru HA02.

Aplicații

Iluminat spațiilor comerciale, iluminat general de interior.

Becurile și modulele LED nu sunt incluse.

IT

Apparecchi orientabili ad incasso, per lampadine a LED tipo PAR16, GU10 (HA01 con BX-QPAR16) e AR111, G53 (HA02 con BX-QR111).

Il modello XHALO, HA01 può essere equipaggiato con moduli a LED XCOMBO, CM03, CM07 e CM08, e HA02 con PrevaLED COIN 111, OSRAM e XCOMBO, CM09.

Corpo in pressofusione di alluminio verniciato a polveri. Portalampe GU10 per HA01 e G53 per HA02.

Campi di applicazione


Illuminazione generale di spazi commerciali, illuminazione generale d'interni.

Lampadine e moduli LED non sono inclusi.

HA01

FINISHING AVAILABLE

MWH



Code	Finishing	Bulbs type	Socket	Power	Input voltage	Ø	Weight
HA01 MWH	MWH	PAR16	GU10	1 x 50W max.	230V AC	Ø75 mm	0.16 kg




Recommended bulbs and LED modules



HA02

FINISHING AVAILABLE

MWH

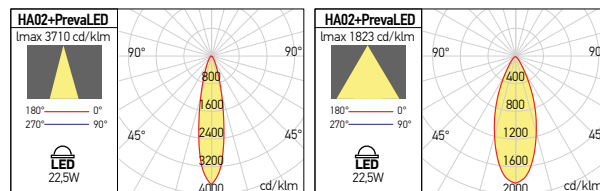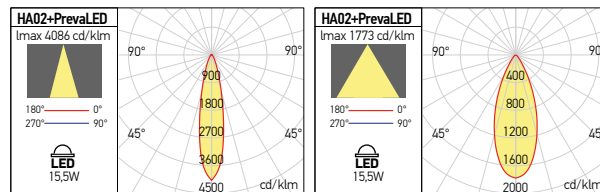

Recommended bulbs and LED modules



Code	Finishing	Bulbs type	Socket	Power	Input voltage	Ø	Weight
HA02 MWH	MWH	AR111	G53	1 x 50W max.	230V AC	Ø170 mm	0.46 kg