# RIO 125 LED 7936 SKU 1325007





# **PRODUCT SPECIFICATION**

### GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	1.25 (Kg)
DIMENSIONS:	H: 210mm W: 125mm D: 55mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable material
LAMP			
LIGHT SOURCE:	High Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	5.7W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	266.6 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	To Be Advised
CRI:	80	L70:	To Be Advised
R9:	-18.0		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	100-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT CURRENT:	700 (mA)	EFFICACY:	46.77 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER / BALLAST INCLUDED?	Yes (Integral)
ADDITIONAL INFORI	MATION		C





THIS PRODUCT CAN BE SPRAY PAINTED




BOX QUANTITY x 6

## PRODUCT ELEVATIONS



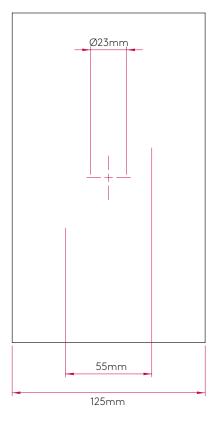

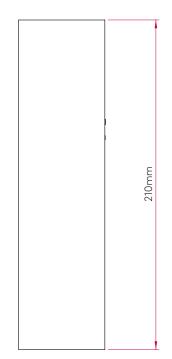

T: +44 (0) 1279 427001

sales@astrolighting.com