


ideal lux | Linus



Code	241968
Item name	LINUS SP WH
Source	LED SMD
Power	34W + 34W ●
Driver included	1-10V
Driver available	No
Lumen	1950 Lm + 1900 Lm ●
MacAdam	-
Beam	104° +104° ●
CCT	3000K
CRI	≥80
UGR	-
LED Life	50.000 h
Insulation class	Class I
IP	20
Material	Aluminum
Warranty	5 years
Net Weight	1,250 Kg
Volume	0,0112 m³
Customizable	No

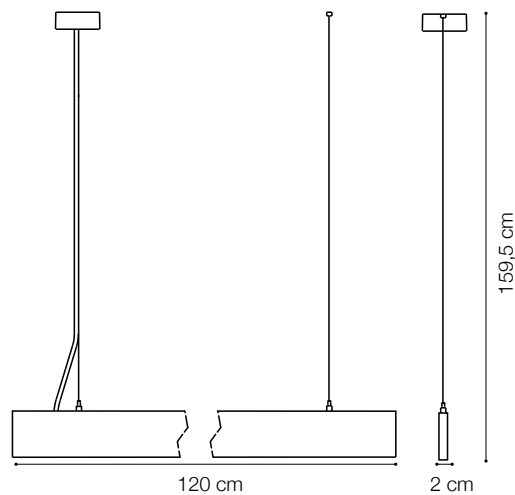

ideal lux | Linus

Code 241982
Item name LINUS CONNETTORE SP



Code 241999
Item name LINUS CORNER WH
Power 3W
Flux 270 Lm
CCT 3000K
Angle 104°

