


Kanlux

22949 RAPID MAXX v2 E27-WW

LED light source

5905339229496



Kanlux RAPID E27 lamps are manufactured with the highest attention to detail. They are characterised by high luminous flux and luminous efficacy of up to 117 lm/W. An additional advantage of these sources of light is the hybrid design of the enclosure.

GENERAL DATA:

Colour: white

Lamp designed for decorative lighting: Not applicable

Compatible with a dimmer: no

Width [mm]: 60

Height [mm]: 109

Diameter [mm]: 60

Depth [mm]: 60

Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 9,5

Material: plastic

Lampshade material: plastic

Light source: A60

Diode type: LED SMD

Total rated luminous flux [lm]: 1050

Useful luminous flux of the light source Φ_{use} [lm]: 1050

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Cap: E27

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥ 25000

Rated beam angle [°]: 180

Rated light level [°]: 180

Lamp rated current [mA]: 80

Annual power consumption [kWh/1000h]: 10

Luminous efficiency of the lamp [lm/W]: 111

Ignition time [s]: $\leq 0,5$

Lamp-heating time to 60% of the full luminous flux [s]: Negligible

Lamp-heating time to 95% [s]: < 2

Lamp premature-failure indicator: $< 5\%$ po 1000h

Date of issue: 14.11.2022, 21:02

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN

Kanlux

22949 RAPID MAXX v2 E27-WW

LED light source

Lamp service life factor after the period of 6000h [%]:
 ≥ 90

Luminous flux retention factor at the end of rated service life [%]: ≥ 70

Luminous flux retention factor after the period of 6000h [%]: ≥ 80

Declaration of equality in power rating [W]: 74

Light source shape: standard

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 34

Grammage [g]: 60.6

Length of a unit pack [cm]: 6

Width of a unit pack [cm]: 6

Height of a unit pack [cm]: 10.5


Weight of a cardboard box [kg]: 6.06

Width of a cardboard box [cm]: 32.5

Height of a cardboard box [cm]: 24

Length of a cardboard box [cm]: 66

Volume of a cardboard box [m³]: 0.05148

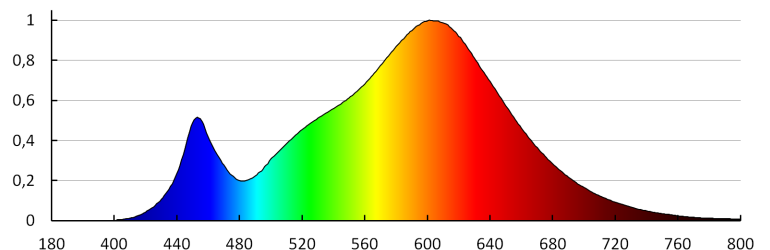

KANLUX S.A. (kat 22949) RAPID MAXX v2 E27-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 22949) RAPID MAXX v2 E27-WW
 Lamps: 1 x RAPID MAXX v2 E27-WW

