

# ***Kanlux***

Kanlux  
**BENO LED**  
**Bulkhead**



Two shapes to choose from:  
**square (L) and round (O).**

Two power solutions:

**18W and 24W**

Two light colors to choose from:


**(WW) and (NW)**

Two colours:


**(GR) and white (W).**

**NEW**

**18W WW, NW**

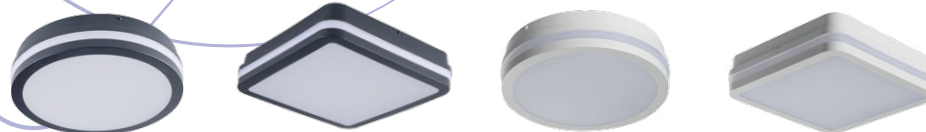



**24W WW, NW**

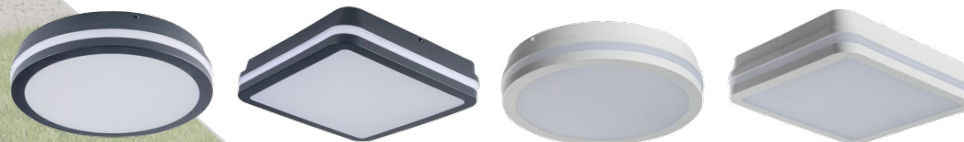

## Modern and unique - **designed to enjoy!**

BENO LED bulkheads are only available at Kanlux. They are a unique LED Bulkheads for several reasons:

- Kanlux has created the concept of this product.
- Luminaries were created on the basis of one off Kanlux order and are now exclusive to Kanlux across the EU
- The Kanlux BENO LED designs have been registered and reserved at the EUIPO

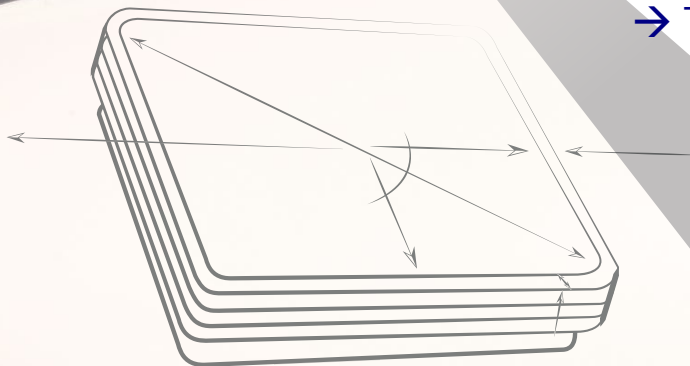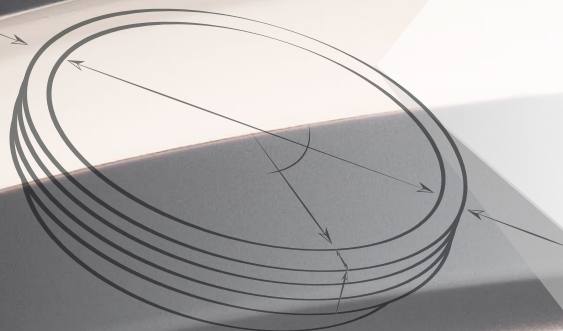



## Unique design & lighting effect

The BENO LED is special to Kanlux as it was created from our passion and the desire to find new solutions.

These luminaires are designed with attention to detail creating a very unique lighting effect whilst adding character to any room you decide to place them In short, the BENO LED has a unique shape that you simply cannot find elsewhere.

These designs have been reserved by Kanlux and are protected in Europe.

Wide range of applications

**Kitchen in geometric style does not tolerate oblique meanings.**

Strong and expressive look for the brave and determined customer.

Kanlux BENO LED bulkheads have stylish lines, and highlights the interior with a dynamic arrangement.

The background image shows a modern office space with a post-industrial aesthetic. It features a dark, textured concrete pillar on the left, a glass-walled office partition, and a glimpse into another room with a white desk and a sink. A warm, glowing rectangular light fixture is mounted on the concrete pillar. The overall lighting is soft and focused, highlighting the textures of the concrete and glass.

Wide range of applications

**Post-industrial office -does not  
exclude comfort at the highest level**

Beno LED are suitable for the stronger accents of interiors such as brick walls or concrete poles. These luminaries will highlight their rough style. Kanlux BENO LED will be ideal for such places!



**Kanlux**

Завантажено з [mamadecor.ua](http://mamadecor.ua)



Wide range of applications

## Hi Grade of weather resistance.

Kanlux Beno is rated IP54 (dustproof and water splash resistant).

Can be used it both, inside (bathroom, corridors, communication routes, rooms lofts, kitchens) as well as outdoors on the external walls.

Installation of Kanlux BENO LED luminance is possible on the ceiling and on the façade.


Thanks to the quick push-terminals connecting the power is fast and simple.



This is not the end of the advantages. At the design stage we thought about everything.

Especially for your convenience, we have equipped Beno at

- **quick installation on „click”,**
- **adjustable motion sensor.**

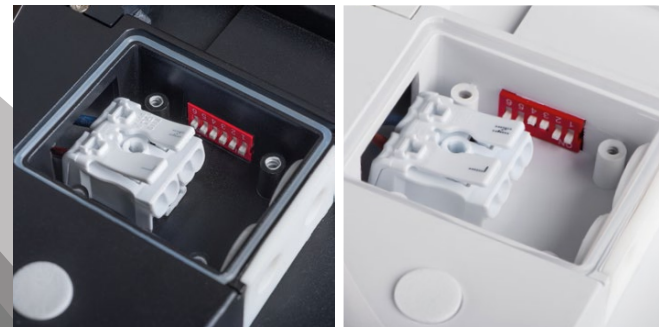

## Basic data

- rated voltage [V]: **220-240 AC**
- power: 18W
- luminous flux: from **1350lm** to **1550lm**
- colour temperature: **3000K, 4000K**
- models with motion sensor  
(with the possibility of switch-DIP)
- UV resistance - **IP54**

## Kanlux BENO 18W NW-O-W; SE W Kanlux BENO 18W NW-O-GR; SE GR



## Kanlux BENO 18W NW-L-W; SE-W Kanlux BENO 18W NW-L-GR; SE-GR







## Available 18W models:

	Index	colour	PIR	power	Lumen output	CCT [K]
BENO 18W WW-L-GR	33380	graphite	N	18W	1350lm	3000K
BENO 18W WW-L-W	33381	white	N	18W	1480lm	3000K
BENO 18W WW-O-GR	33382	graphite	N	18W	1350lm	3000K
BENO 18W WW-O-W	33383	white	N	18W	1480lm	3000K
BENO 18W NW-O-W	32940	white	N	18W	1550lm	4000K
BENO 18W NW-O-GR	32941	graphite	N	18W	1550lm	4000K
BENO 18W NW-L-W	32942	white	N	18W	1550lm	4000K
BENO 18W NW-L-GR	32943	graphite	N	18W	1550lm	4000K
BENO 18W NW-O-SE W	32944	white	Y	18W	1550lm	4000K
BENO 18W NW-O-SE GR	32945	graphite	Y	18W	1550lm	4000K
BENO 18W NW-L-SE W	32946	white	Y	18W	1550lm	4000K
BENO 18W NW-L-SE GR	32947	graphite	Y	18W	1550lm	4000K

**NEW**

### Surface mount fittings:

Housing material: plastic

Diffuser: plastic


## Basic data

- rated voltage [V]: **220-240 AC**
- power: **24W**
- luminous flux: from **1880lm** to **2060lm**
- colour temperature: **3000K, 4000K**
- models with motion sensor  
(with the possibility of switch-DIP)
- UV resistance - **IP54**

## Kanlux BENO 24W NW-O-W; SE W Kanlux BENO 24W NW-O-GR; SE GR



## Kanlux BENO 24W NW-L-W; SE-W Kanlux BENO 24W NW-L-GR; SE-GR

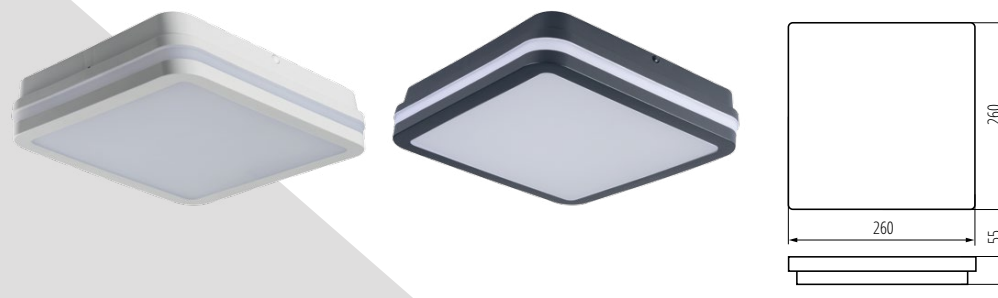





## Available 24W models:

	Index	colour	PIR	power	Lumen output	CCT [K]
BENO 24W WW-L-GR	33384	graphite	N	24W	1880lm	3000K
BENO 24W WW-L-W	33385	white	N	24W	2040lm	3000K
BENO 24W WW-O-GR	33386	graphite	N	24W	1880lm	3000K
BENO 24W WW-O-W	33387	white	N	24W	2040lm	3000K
BENO 24W NW-O-W	33340	white	N	24W	2060lm	4000K
BENO 24W NW-O-GR	33341	graphite	N	24W	1920lm	4000K
BENO 24W NW-L-W	33342	white	N	24W	2060lm	4000K
BENO 24W NW-L-GR	33343	graphite	N	24W	1920lm	4000K
BENO 24W NW-O-SE W	33344	white	Y	24W	2060lm	4000K
BENO 24W NW-O-SE GR	33345	graphite	Y	24W	1920lm	4000K
BENO 24W NW-L-SE W	33346	white	Y	24W	2060lm	4000K
BENO 24W NW-L-SE GR	33347	graphite	Y	24W	1920lm	4000K

**NEW**

### Surface mount fittings:

Housing material: plastic

Diffuser: plastic

## Kanlux **BENO 18W and 24W**



**Well packed.**