




# Outdoor Facade Updown



	EAN	L x W x H	W	lm	lm/W	K	IP	IK
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	55x90x160	12	700	60	3000K	54	06
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	55x90x160	12	700	60	3000K	54	06

	EAN		 (°C)	PF	R <sub>a</sub>	V <sub>AC</sub>	Hz	
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	280°	-20...40	≥ 0.5	> 80	220-240V	50/60 Hz	0.5 kg
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	280°	-20...40	≥ 0.5	> 80	220-240V	50/60 Hz	0.5 kg









IP54

SMD  
LED








LEDVANCE

Outdoor Facade Updown

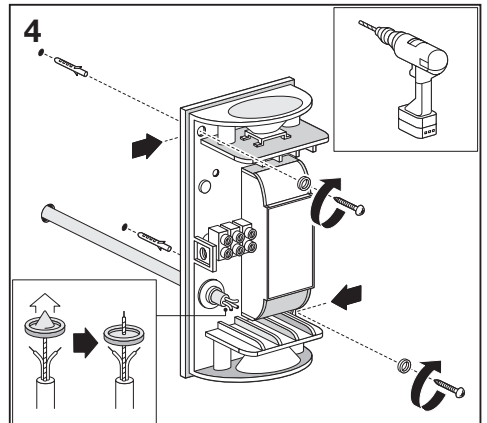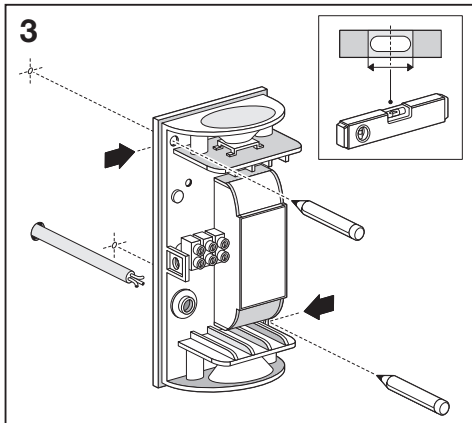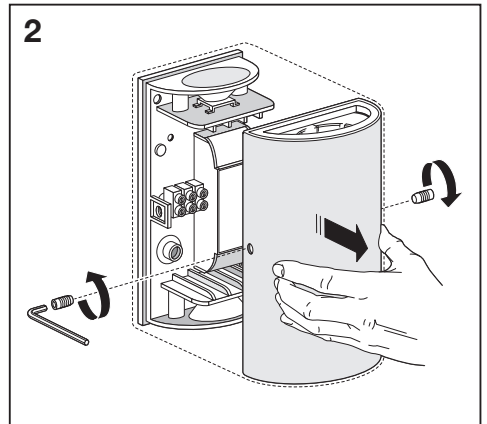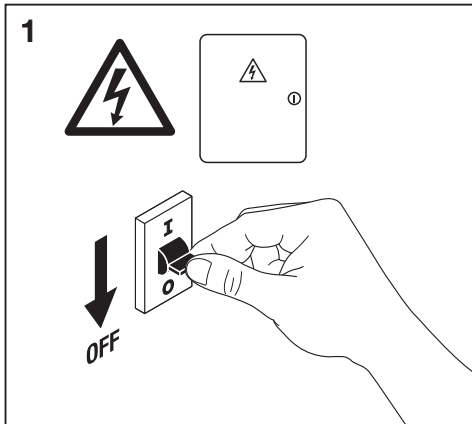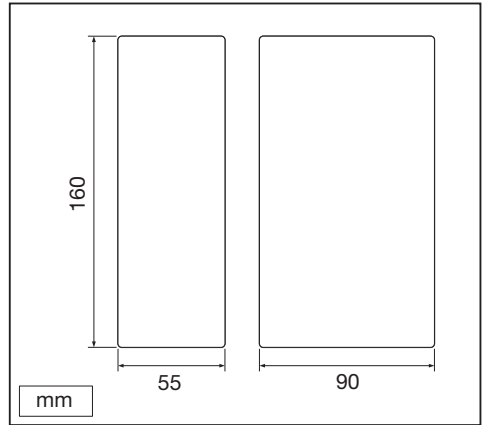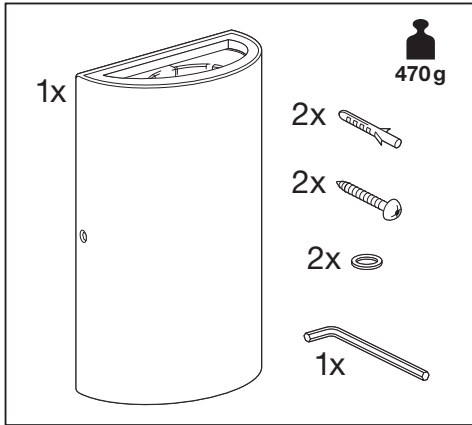

Outdoor Facade Updown

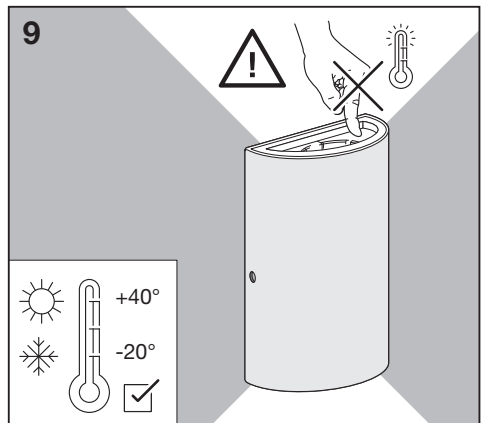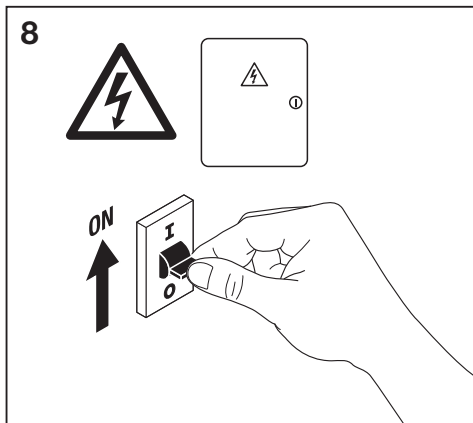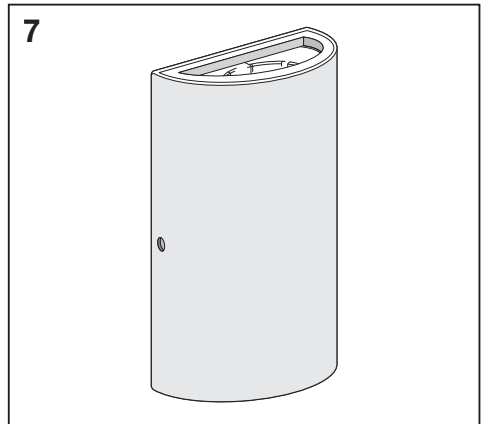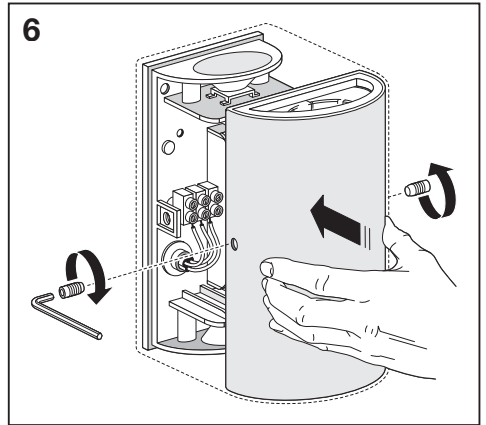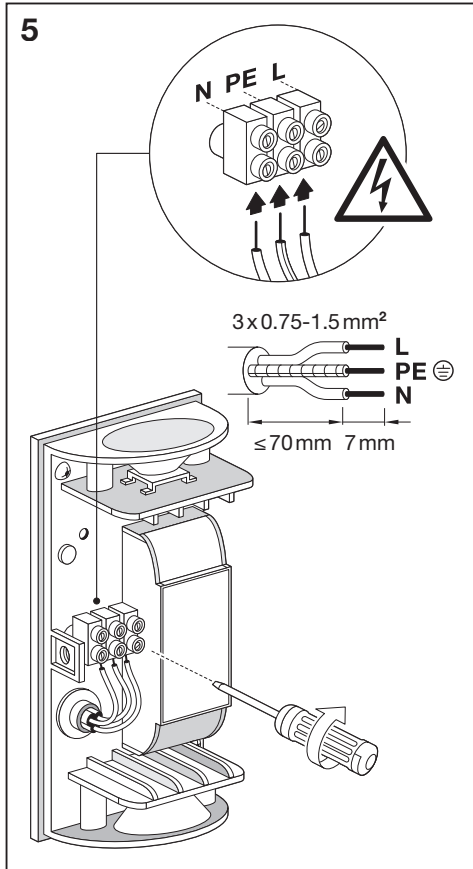

[www.luminaires.ledvance.com](http://www.luminaires.ledvance.com)



Downlight



Spot



Linear



Panel



Surface



DampProof  
IP65



HighBay



Floodlight



C10449057  
G11027764  
25.10.17

LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg  
Germany  
[www.ledvance.com](http://www.ledvance.com)