

PRODUCT FAMILY DATASHEET

DAMP PROOF

Damp-proof luminaires, classic shape



AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

PRODUCT BENEFITS

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Easy installation, no tools required for connection
- 5 years guarantee

PRODUCT FEATURES

- High luminous efficacy: up to 115 lm/W
- Beam angle: 105°







TECHNICAL DATA

Product description	Electrical data			Luminaire control gear data	Photometrical data				Light technical data	Dimensions & weight	
	Nominal wattage	Nominal voltage	Mains frequency	Output current	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Length	Width
DP 1200 21 W 4000K IP65 GY	21.00 W	220...240 V	50/60 Hz	250 mA	4000 K	2400 lm	Cool White	>80	105 °	1200 mm	95.0 mm
DP 1200 39 W 4000K IP65 GY	39.00 W	220...240 V	50/60 Hz		4000 K	4400 lm	Cool White	>80	105 °	1200 mm	95.0 mm
DP 1200 39 W 6500K IP65 GY	39.00 W	220...240 V	50/60 Hz		6500 K	4400 lm	Cool Daylight	>80	105 °	1200 mm	95.0 mm
DP 1500 30 W 4000K IP65 GY	30.00 W	220...240 V	50/60 Hz	350 mA	4000 K	3500 lm	Cool White	>80	105 °	1500 mm	95.0 mm
DP 1500 55 W 4000K IP65 GY	55.00 W	220...240 V	50/60 Hz		4000 K	6400 lm	Cool White	>80	105 °	1500 mm	95.0 mm
DP 1500 55 W 6500K IP65 GY	55.00 W	220...240 V	50/60 Hz		6500 K	6400 lm	Cool Daylight	>80	105 °	1500 mm	95.0 mm
DP 1200 21 W 6500 K IP65 GY	21.00 W	220...240 V	50/60 Hz	250 mA	6500 K	2400 lm	Cool Daylight	>80	105 °	1200 mm	95.0 mm
DP 1500 30 W 6500 K IP65 GY	30.00 W	220...240 V	50/60 Hz	350 mA	6500 K	3500 lm	Cool Daylight	>80	105 °	1500 mm	95.0 mm

Product description	Height	Product weight	Colors & materials				Temperatures & operating conditions	Lifespan	
			Body material	Housing color	Product color	Cover material	Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C
DP 1200 21 W 4000K IP65 GY	78.0 mm	1650.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1200 39 W 4000K IP65 GY	78.0 mm	1650.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1200 39 W 6500K IP65 GY	78.0 mm	1650.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1500 30 W 4000K IP65 GY	78.0 mm	2300.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1500 55 W 4000K IP65 GY	78.0 mm	2300.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1500 55 W 6500K IP65 GY	78.0 mm	2300.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1200 21 W 6500 K IP65 GY	78.0 mm	1650.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h
DP 1500 30 W 6500 K IP65 GY	78.0 mm	2300.00 g	Polycarbonate (PC)	Gray	Gray	Polycarbonate (PC)	-30...+40 °C	25000	50000 h

Product description	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C	Capabilities		Certificates & standards		
			Dimmable	Type of connection	Protection class	Type of protection	Luminaire with limited surface temperature, class "D"
DP 1200 21 W 4000K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1200 39 W 4000K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1200 39 W 6500K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1500 30 W 4000K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1500 55 W 4000K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1500 55 W 6500K IP65 GY	35000 h	20000 h	No	Screwless terminal, 3-Pole	I	IP65	Yes
DP 1200 21 W 6500 K IP65 GY	35000 h	20000 h	No	Terminal, 3-pin	I	IP65	Yes
DP 1500 30 W 6500 K IP65 GY	35000 h	20000 h	No	Terminal, 3-pin	I	IP65	Yes

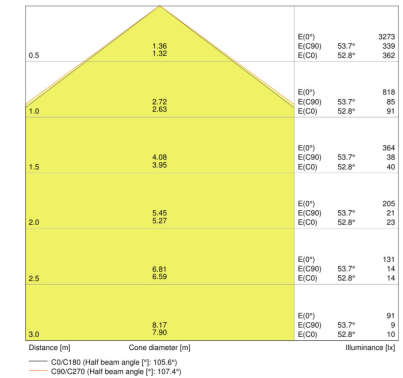





DP 1200 21 W 4000K IP65 GY, DP 1200 39 W 4000K IP65 GY, DP 1200 39 W 6500K IP65 GY, DP 1200 21 W 6500 K IP65 GY

DP 1500 30 W 4000K IP65 GY, DP 1500 55 W 4000K IP65 GY, DP 1500 55 W 6500K IP65 GY

DP 1500 30 W 6500 K IP65 GY

DP 1200 21 W 4000K IP65 GY

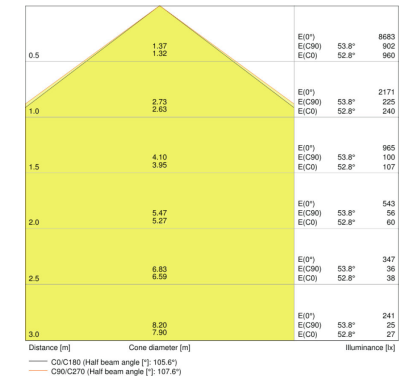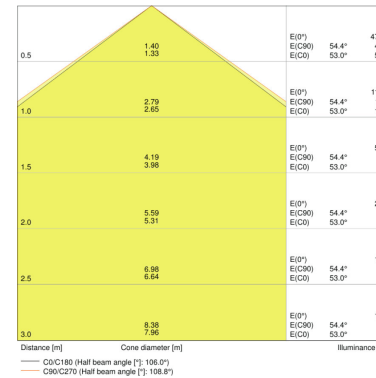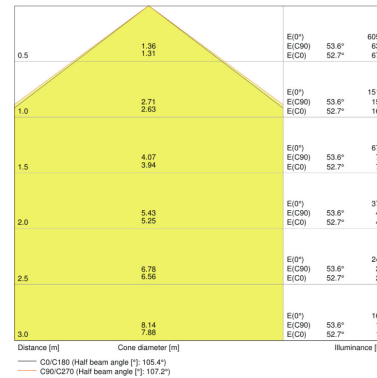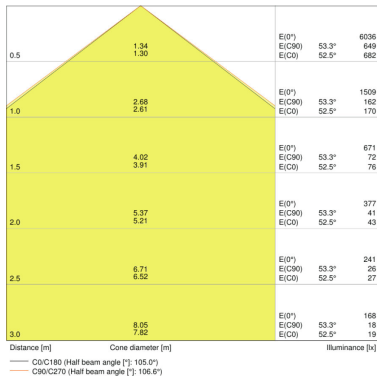


DP 1200 39 W 4000K IP65 GY


DP 1200 39 W 6500K IP65 GY

DP 1500 30 W 4000K IP65 GY


DP 1500 55 W 4000K IP65 GY

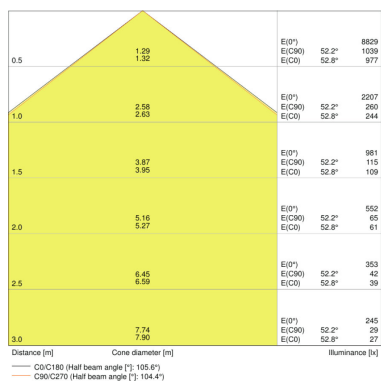

DP 1500 55 W 6500K IP65 GY

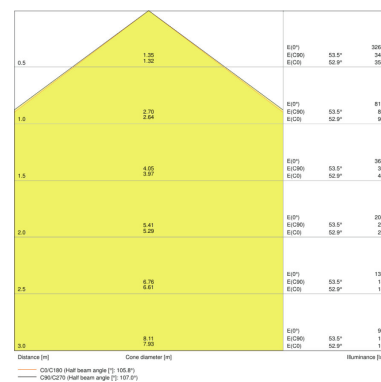

DP 1200 21 W 6500 K IP65 GY

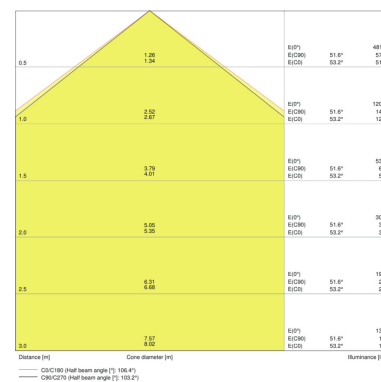

DP 1500 30 W 6500 K IP65 GY

EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075079908	Shipping carton box 6	1225 mm x 333 mm x 192 mm	11992.00 g	78.32 dm ³
4058075079922	Shipping carton box 6	1225 mm x 333 mm x 192 mm	11992.00 g	78.32 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075079861	Shipping carton box 6	1225 mm x 333 mm x 192 mm	11992.00 g	78.32 dm ³
4058075079946	Shipping carton box 6	1525 mm x 333 mm x 192 mm	16355.00 g	97.50 dm ³
4058075079960	Shipping carton box 6	1525 mm x 333 mm x 192 mm	16355.00 g	97.50 dm ³
4058075079885	Shipping carton box 6	1525 mm x 333 mm x 192 mm	16355.00 g	97.50 dm ³
4058075218031	Shipping carton box 6	1225 mm x 333 mm x 192 mm	11992.00 g	78.32 dm ³
4058075218055	Shipping carton box 6	1525 mm x 333 mm x 192 mm	16355.00 g	97.50 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.