



**Niloé™ Step
 Cover plates**

**Cat. No(s): 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75
 8 645 61/71/72/73/74/75 - 8 646 61/71/72/73/74/75
 8 647 71/72/73/74/75 - 8 648 71/72/73/74/75
 8 649 71/72/73/74/75**



8 64X 61



8 64X 72

1. USE

Faceplates for Niloé Step from 1 to 5 gangs wiring accessories.
 Available in several colours.

2. RANGE

1-gang plates

| | | |
|--|---|--|
| | 1-gang plate with label holder ○ White ● Aluminium ● Black ● Sand | 8 641 61 8 643 61 8 645 61 8 646 61 |
| | ○ White ● Aluminium ● Black ● Sand ● Copper ● Brushed aluminium ● Dark wood | 8 641 71 8 643 71 8 645 71 8 646 71 8 647 71 8 648 71 8 649 71 |

2-gang plates

71 mm spacing - horizontal and vertical

| | | |
|--|---|--|
| | ○ White ● Aluminium ● Black ● Sand ● Copper ● Brushed aluminium ● Dark wood | 8 641 72 8 643 72 8 645 72 8 646 72 8 647 72 8 648 72 8 649 72 |
|--|---|--|

2. RANGE (continued)

3-gang plates

71 mm spacing - horizontal and vertical

| | | |
|--|---|--|
| | ○ White ● Aluminium ● Black ● Sand ● Copper ● Brushed aluminium ● Dark wood | 8 641 73 8 643 73 8 645 73 8 646 73 8 647 73 8 648 73 8 649 73 |
|--|---|--|

4-gang plates

71 mm spacing - horizontal and vertical

| | | |
|--|---|--|
| | ○ White ● Aluminium ● Black ● Sand ● Copper ● Brushed aluminium ● Dark wood | 8 641 74 8 643 74 8 645 74 8 646 74 8 647 74 8 648 74 8 649 74 |
|--|---|--|

5-gang plates


71 mm spacing - horizontal and vertical

| | | |
|--|---|--|
| | ○ White ● Aluminium ● Black ● Sand ● Copper ● Brushed aluminium ● Dark wood | 8 641 75 8 643 75 8 645 75 8 646 75 8 647 75 8 648 75 8 649 75 |
|--|---|--|

Niloé™ Step Cover plates

Cat. No(s): 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75
8 645 61/71/72/73/74/75 - 8 646 61/71/72/73/74/75
8 647 71/72/73/74/75 - 8 648 71/72/73/74/75
8 649 71/72/73/74/75

3. OVERALL DIMENSIONS (mm)

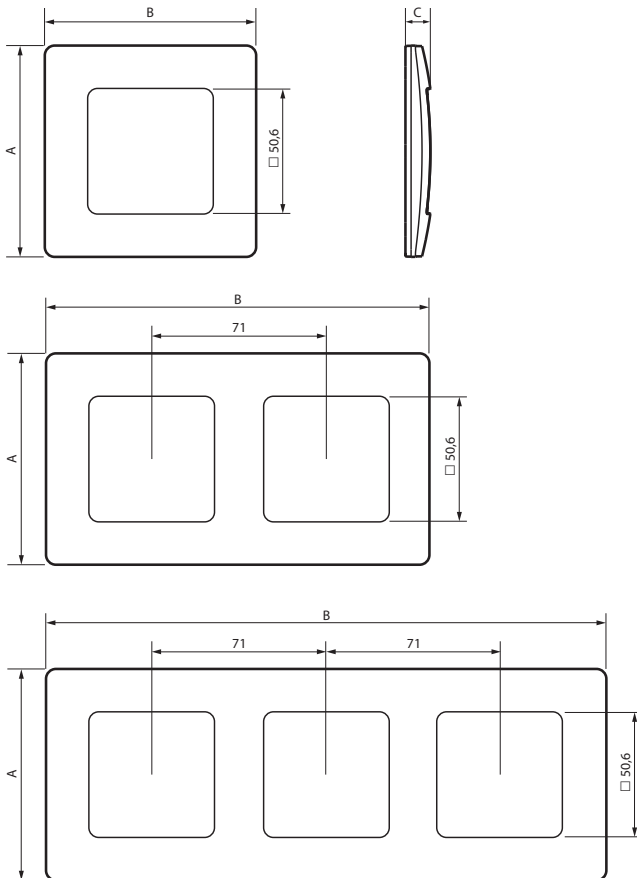

| | A | B | C |
|--------------------------------|----|-----|----|
| 1-gang | 86 | 86 | 10 |
| 2-gang 71 mm fixing centres | 86 | 157 | 10 |
| 3-gang 71 mm fixing centres | 86 | 228 | 10 |
| 4-gang 71 mm fixing centres | 86 | 299 | 10 |
| 5-gang 71 mm fixing centres | 86 | 370 | 10 |

4. TECHNICAL CHARACTERISTICS

■ 4.1 Materials

Matt surface appearance

Material: - ABS plate

- Halogen-free

- UV resistant

Self-extinguishing:

+ 850°C/30 s for insulating parts holding live parts in place

+ 650°C/30 s for other parts made of insulating materials

■ 4.2 Climatic characteristics

Storage and usage temperature: - 5°C to + 35°C

5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.