



Ceiling suspended

Ceiling suspended


BALL L



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.1800.28.930.WH	2028	28	3000	>90	220	White
02.1800.28.930.BK	2028	28	3000	>90	220	Black




LED CE ENE III F IP20 A+ A+ A INCL opal MATERIAL | AL PC i » 188





BALL L DTW



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.1800.28.DTW.BK	2028	28	DIM to warm 1800-3000	>90	220	Black



LED CE ENE III F IP20 A+ A+ A INCL opal MATERIAL | AL PC i » 188

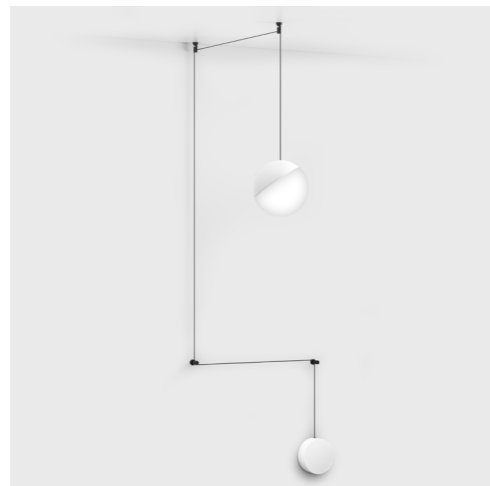

02.1800.28.930.WH



02.1800.28.930.BK

Dim to warm it is a new technology for regulation of light intensity and color temperature synchronously.

3000K
100%



2700K
50%



1800K
5%

