

HALMSTAD





HALMSTAD Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate lens.

Art	Watt	Class	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Height (cm)	Dimmable
210	-	II	E27	-	-	-	A+..D	26cm	-
212	8,5W	II	LED E27	252 lm	2700K	25 000h	A+	26cm	Dim. Triac
211	10W	I	LED	252 lm	3000K	50 000h	A+	26cm	Dim. Triac
295	-	II	E27	-	-	-	A+..D	49cm	-
1488	8,5W	II	LED E27	252 lm	2700K	25 000h	A+	49cm	Dim. Triac
1489	10W	I	LED	252 lm	3000K	50 000h	A+	49cm	Dim. Triac
296	-	II	E27	-	-	-	A+..D	85cm	-
1483	8,5W	II	LED E27	252 lm	2700K	25 000h	A+	85cm	Dim. Triac
1482	10W	I	LED	252 lm	3000K	50 000h	A+	85cm	Dim. Triac

Accessories for Halmstad

205	Concreting anchor	p. 114
206	Anchoring support	p. 114

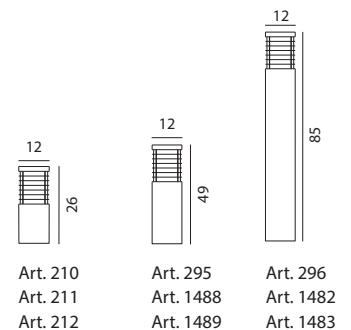

Art. 212, 1488 i 1483: 8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEL: A+

* **Halmstad with 4000K** available by request, contact your supplier.