




MIRROR LED 9340 CH



KAGERA LED L 9502 CH


KAGERA LED M 9503 CH

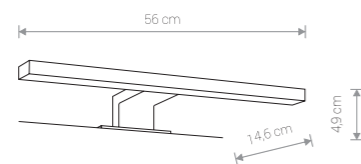

MIRROR LED

aluminium, PC / aluminium, PC / алюминий, PC


9340 ● CH

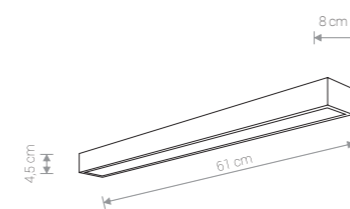

KAGERA LED M

szkło, PMMA, aluminium chromowane / glass, PMMA, electroplated aluminium / стекло, PMMA, хромированное алюминий

9503 ● CH

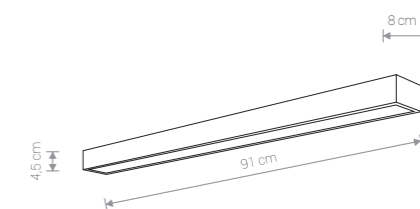

KAGERA LED L

szkło, PMMA, aluminium chromowane / glass, PMMA, electroplated aluminium / стекло, PMMA, хромированное алюминий

9502 ● CH

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	SAFETY TYPE	INPUT	POWER FACTOR	INGRESS PROTECTION
9340	8W LED EPISTAR	3000K	600 lm	90°	80	□	~220-240V, 50Hz	> 0,5	IP 44

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	SAFETY TYPE	INPUT	POWER FACTOR	INGRESS PROTECTION
9503	18W LED	4000K	1000 lm	120°	80	⊕	~220-240V, 50Hz	> 0,5	IP 44
9502	24W LED	4000K	1380 lm	120°	80	⊕	~220-240V, 50Hz	> 0,5	IP 44