




ARENA LED 6771 SI



ARENA 6725 GR



ARENA 6724 WH

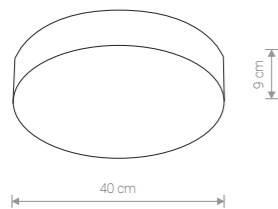


ARENA

stal chromowana, szklo / electroplated steel, glass /
хромированная сталь, стекло

6724 ○ WH 6770 ○ SI 6725 ● GR

3×E14, max 20W
IP 44

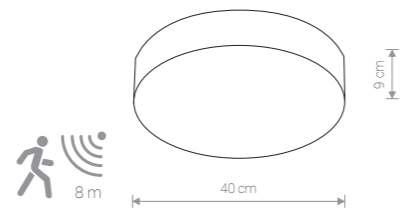

ARENA SENSOR


stal chromowana, szklo / electroplated steel, glass /
хромированная сталь, стекло

8832 ○ WH 8833 ● GR

3×E14, max 20W
IP 44



ARENA LED 6727 GR



ARENA LED

stal chromowana, szklo / electroplated steel, glass /
хромированная сталь, стекло

6726 ○ WH 6771 ○ SI 6727 ● GR

IP 44

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI →)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION
6726	20W LED	4000K	1600 lm	140°	80	~220-240V, 50Hz	⊕	0,95	IP 44
6771	20W LED	4000K	1600 lm	140°	80	~220-240V, 50Hz	⊕	0,95	IP 44
6727	20W LED	4000K	1600 lm	140°	80	~220-240V, 50Hz	⊕	0,95	IP 44