


LHOTSE LED 4447 GR




LHOTSE LED

aluminium, PC / aluminium, PC / алюминий, PC

4447 ● GR





LHOTSE LED 4448 GR

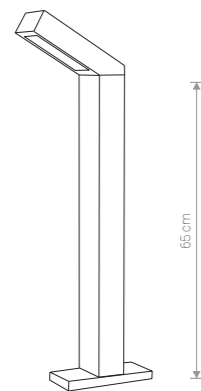

LHOTSE LED

aluminium, PC / aluminium, PC / алюминий, PC

4448 ● GR

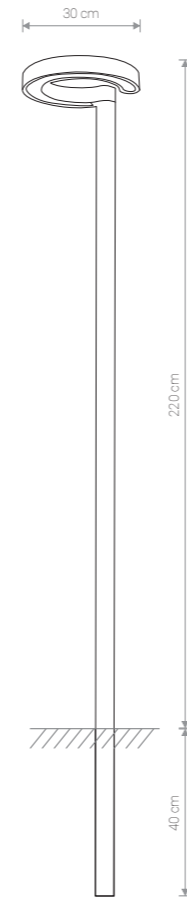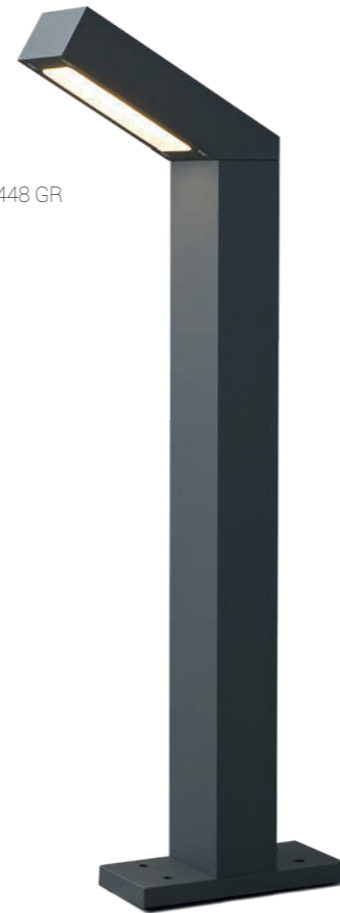

POLE LED

aluminium, PC / aluminium, PC / алюминий, PC

9185 ● GR



POLE LED 9185 GR

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI <sub>2</sub> )	SAFETY TYPE	INPUT	POWER FACTOR	INGRES PROTECTION	LIFETIME
4447	3x3W LED	3000K	169 lm	72°	80	⊕	~220-240V, 50 Hz	0,79	IP 54	10 000 h
4448	3x3W LED	3000K	169 lm	72°	80	⊕	~220-240V, 50 Hz	0,79	IP 54	10 000 h
9185	12x2W LED	3000K	950 lm	54°	81	⊕	~220-240V, 50 Hz	0,94	IP 54	30 000 h