





SPIN LED M 10370

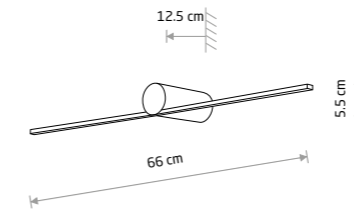

SPIN LED S

Painted aluminum, plastic PC


10368 3000K 10620 4000K

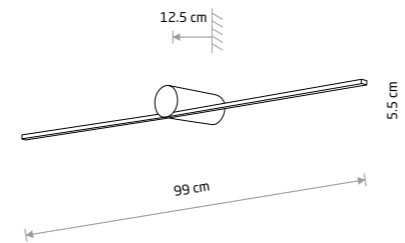

SPIN LED M

Painted aluminum, plastic PC

10370 3000K 10621 4000K

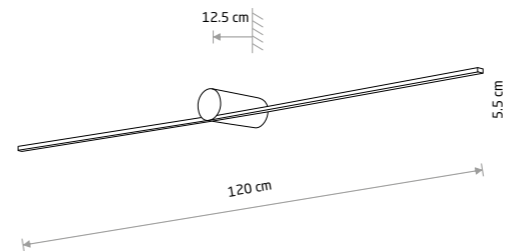

SPIN LED L

Painted aluminum, plastic PC

10371 3000K 10622 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10368	10W LED	3000K	360 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10620	10W LED	4000K	390 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10370	14W LED	3000K	520 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10621	14W LED	4000K	550 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10371	16W LED	3000K	600 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10622	16W LED	4000K	630 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h