



SABER LED L 10314

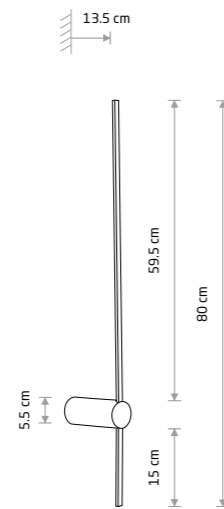

**SABER LED M**

■ painted aluminum, plastic PC


■ 10312 3000K ■ 10853 4000K

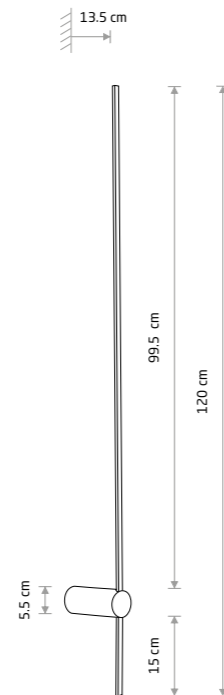

**SABER LED L**

■ painted aluminum, plastic PC


■ 10314 3000K ■ 10854 4000K

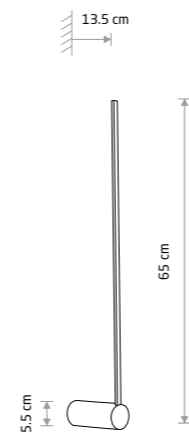

**ARM LED M**

■ painted aluminum, plastic PC

■ 10366 3000K ■ 10855 4000K

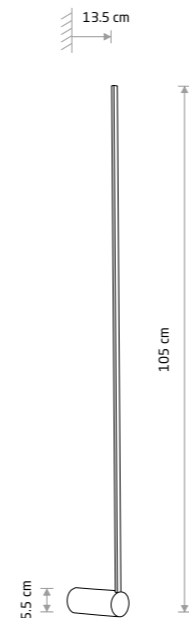

**ARM LED L**

■ painted aluminum, plastic PC

■ 10367 3000K ■ 10856 4000K



ARM LED L 10856



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10312	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10853	11W LED	4000K	410 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10314	16W LED	3000K	540 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10854	16W LED	4000K	570 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10366	10W LED	3000K	360 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10855	10W LED	4000K	390 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10367	14W LED	3000K	520 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10856	14W LED	4000K	550 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h