

LUMINAIRE PHOTOMETRIC TEST REPORT

8260 CL HALL PRO LED WHITE, 4000K

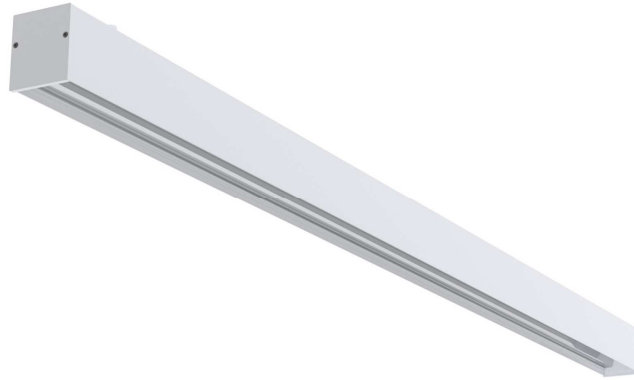

Description Lines

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8260 CL HALL PRO LED WHITE,4000K
File name:	8260 CL HALL PRO LED WHITE,4000K.ltd
Date:	2020-08-11
Report number:	GL R 0442020
Length:	1505mm
Width:	60mm
Height:	70mm
IP rating:	IP 20
Protection class:	I
Dimmable:	No

Equipment

Goniometer:	GLG 30-1800
Power supply/meter:	IT7321 SN:600476010707720011
Photometer:	GL PHOTOMETER 3.0 LS nr GL200221
Spectroradiometer:	Spectis 1.0 GLX SN: 2012085
Temperature:	25 +/-1 °C
γ interval:	5 deg
C interval:	5 deg
γ range:	+/- 90 deg
Measurement distance:	10 m


Photometric data

Nowodvorski

L I G H T I N G

Total luminous flux:	5548 lm
Color temperature:	4026 K
x:	0.3790
y:	0.3749
Color rendering index:	84.18
Wattage:	38.43 W
U	230.026 V
I	0.170 A
Power factor:	0.980
Luminous efficacy:	144 lm/W
Flux in lower hemisphere:	100.0 %
Flux in upper hemisphere:	0.0 %
Maximum luminous intensity:	3371.16 cd
Light output ratio (LOR):	100.00%

Beam cone diagram
Beam angle 80°

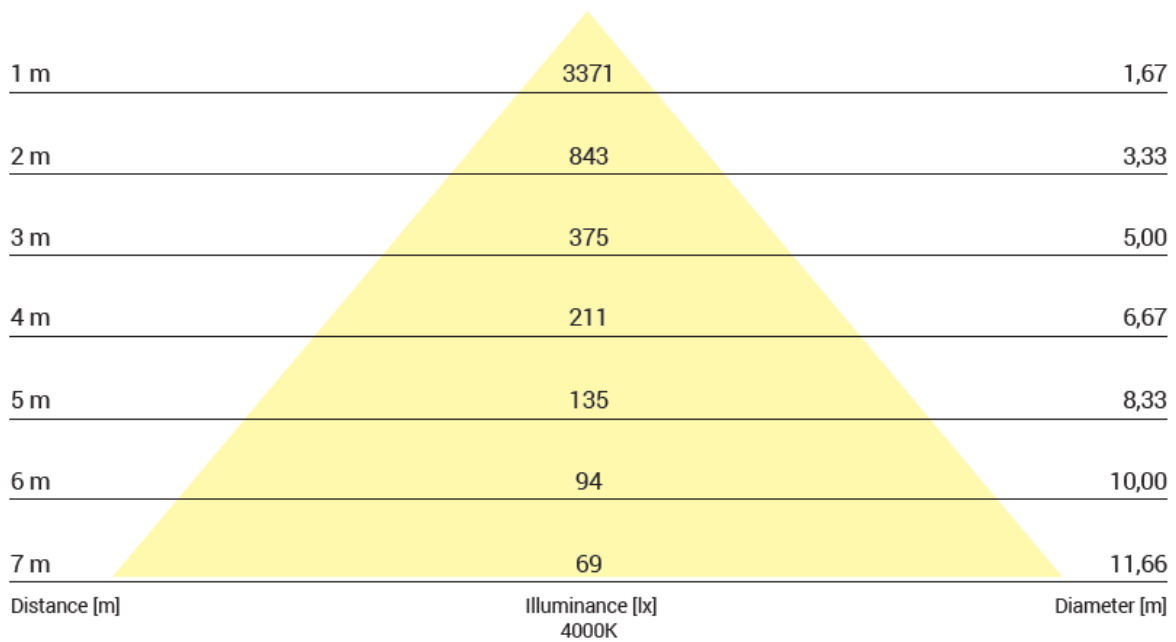


Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


www.nowodvorski.com

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

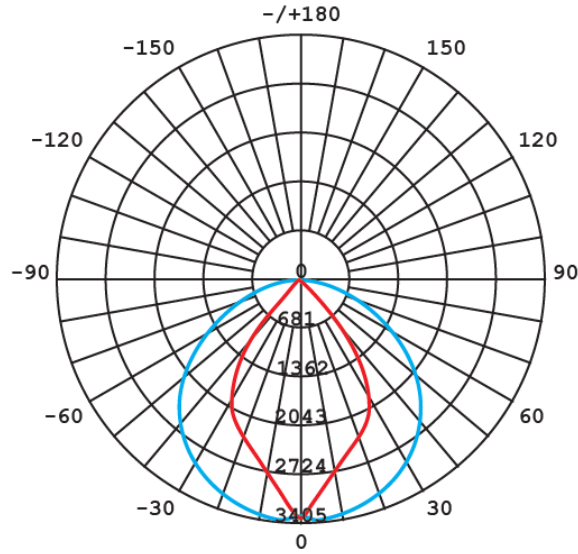

Luminous intensity [cd]
 C0-C180 ————
 C90-C270 ————

Spectral distribution

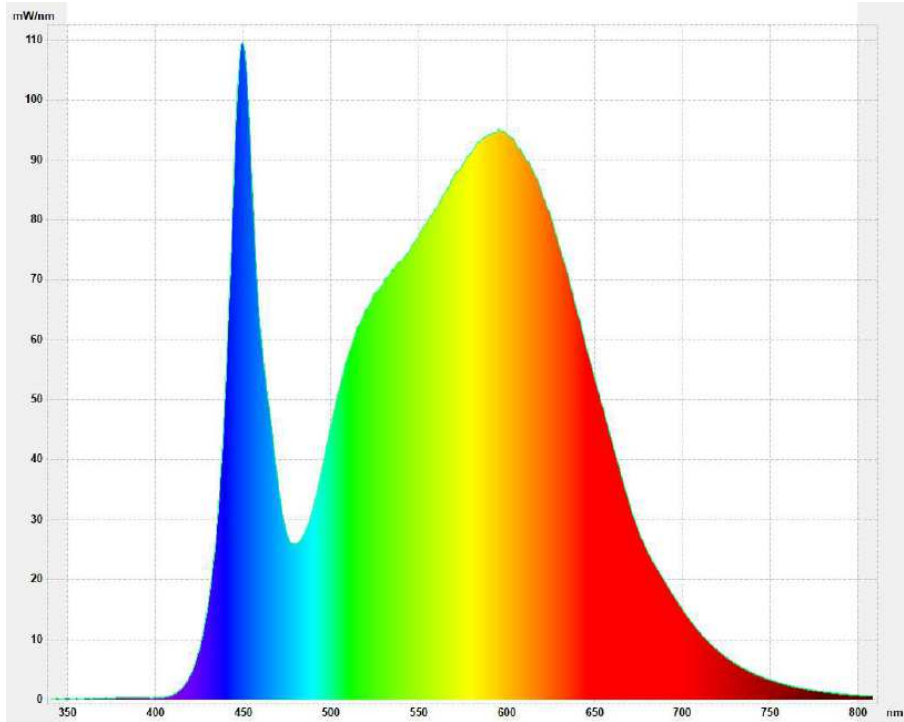

Nowodvorski sp. j.
 ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208
 Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12
www.nowodvorski.com