

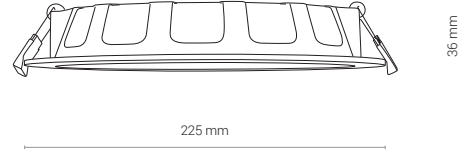


# CL KOS LED 24W

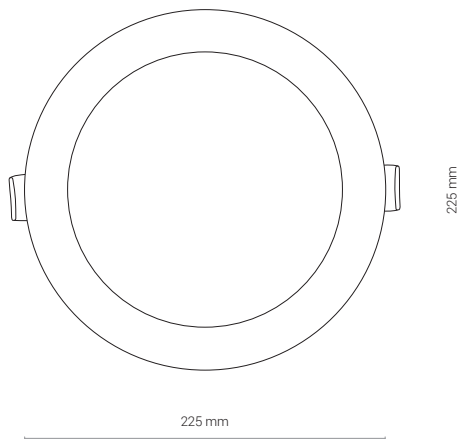

cut out  $\varnothing$  200 mm

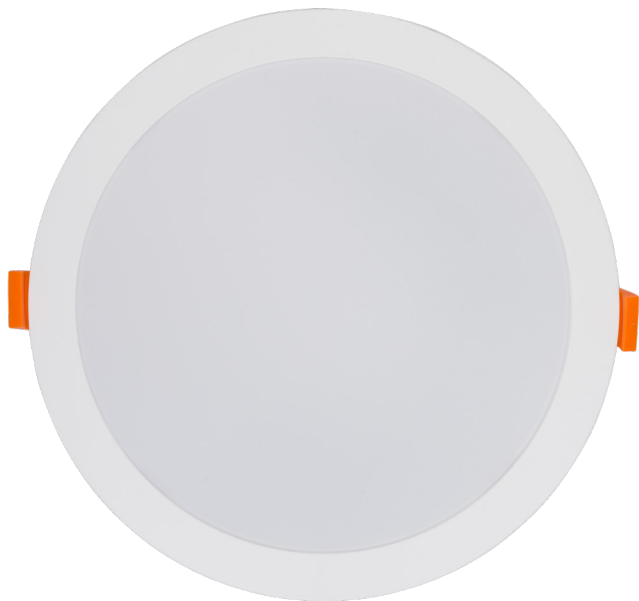

# CL KOS LED 24W


PC / PC / PC

8775  WH - 3000K

8774  WH - 4000K


Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8775	24W	3000K	2200	100°	≥80	44	SANAN	DRIVER ON BOARD	50000h	5 YEARS
8774	24W	4000K	2200	100°	≥80	44	SANAN	DRIVER ON BOARD	50000h	5 YEARS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

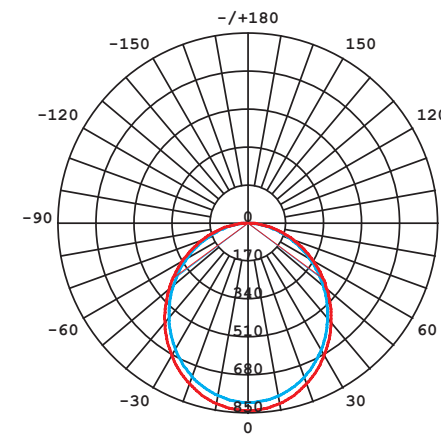


Luminous intensity [cd]  
C0-C180 —  
C90-C270 —

Beam cone diagram  
Beam angle 100°

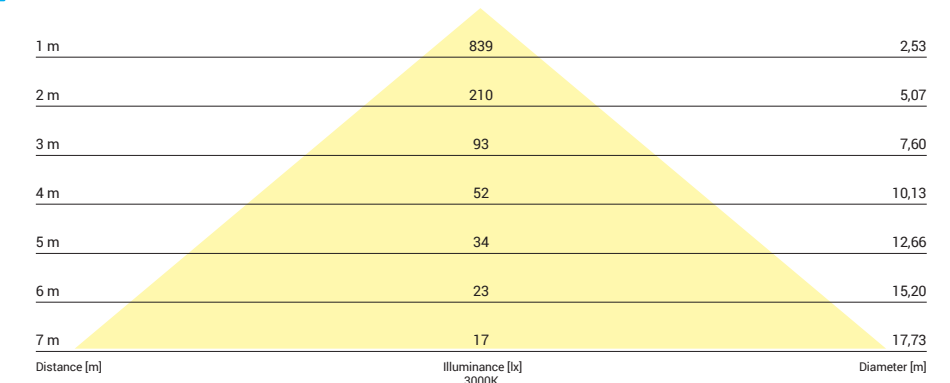


8775, 24W, 3000K, beam angle 100°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

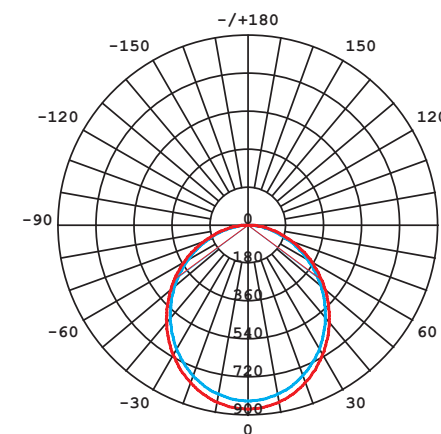

Luminous intensity [cd]  
C0-C180 —  
C90-C270 —

Beam cone diagram  
Beam angle 100°

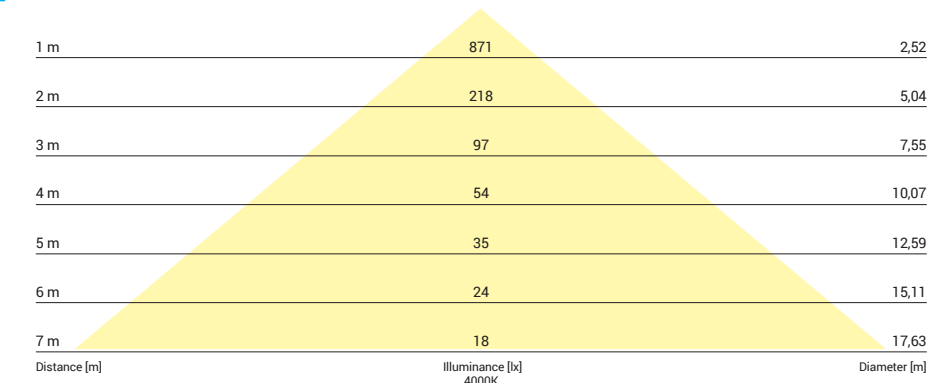

8774, 24W, 4000K, beam angle 100°