

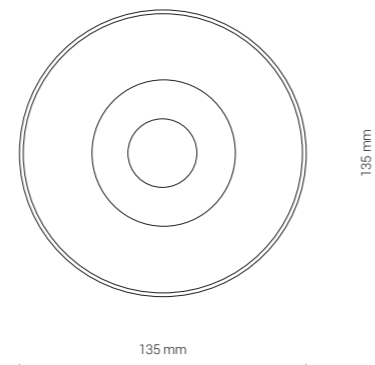


CL IOS LED 30W

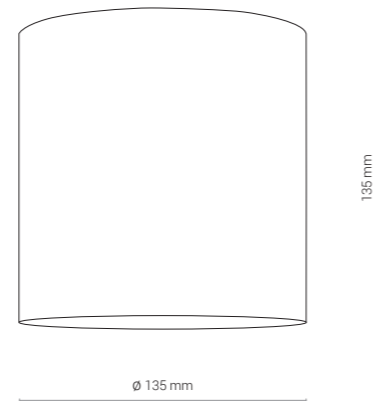


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

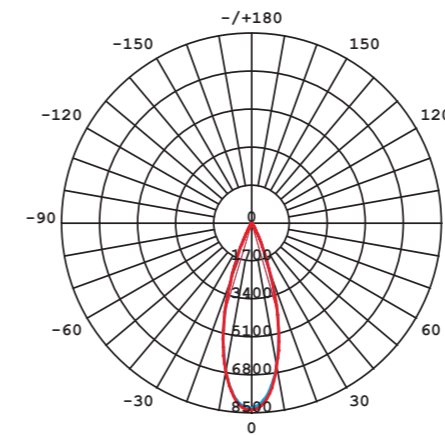


Luminous intensity [cd]
C0-C180 — 8500
C90-C270 — 1700

Beam cone diagram
Beam angle 36°

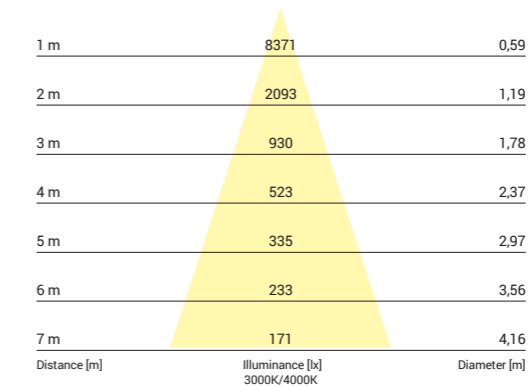


8727, 8728, 8730, 8731, 30W, 3000K, 4000K, beam angle 36°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

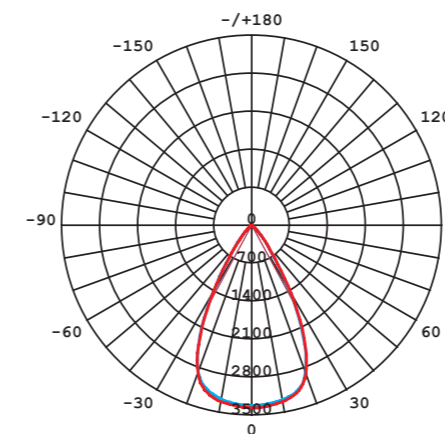

Luminous intensity [cd]
C0-C180 — 3300
C90-C270 — 1650

Beam cone diagram
Beam angle 60°

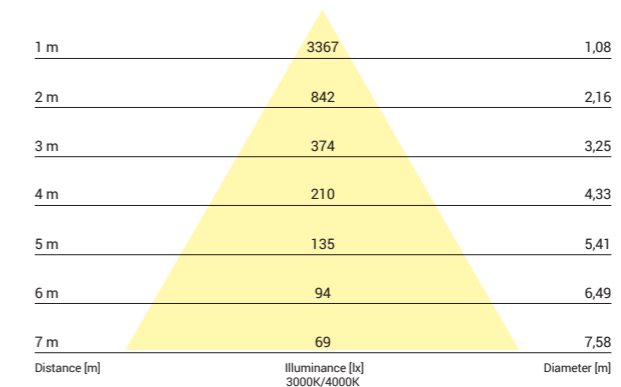

8732, 8733, 8734, 8735, 30W, 3000K, 4000K, beam angle 60°

CL IOS LED 30W, 36°

aluminium / aluminum / алюминий

- 8731 ○ WH - 3000K
- 8728 ● BL - 3000K
- 8730 ○ WH - 4000K
- 8727 ● BL - 4000K

CL IOS LED 30W, 60°

aluminium / aluminum / алюминий

- 8735 ○ WH - 3000K
- 8733 ● BL - 3000K
- 8734 ○ WH - 4000K
- 8732 ● BL - 4000K

Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8735	30W	3000K	2700	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8734	30W	4000K	2700	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8733	30W	3000K	2700	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8732	30W	4000K	2700	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8731	30W	3000K	2700	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8730	30W	4000K	2700	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8728	30W	3000K	2700	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8727	30W	4000K	2700	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS