
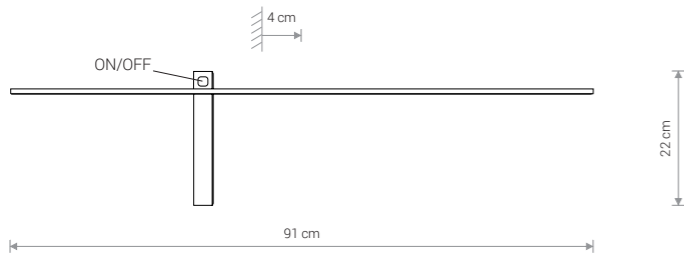


IMPULSE LED S

aluminium, PC / aluminium, PC / алюминий, PC



8115 ● BL

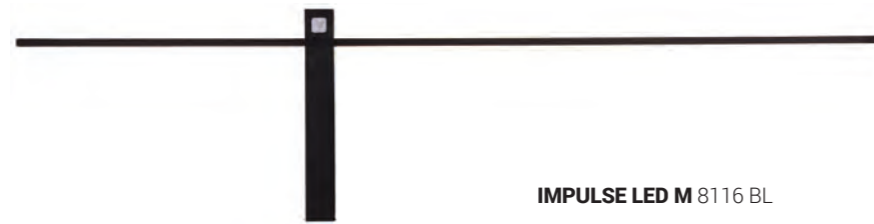

IMPULSE LED M

aluminium, PC / aluminium, PC / алюминий, PC

8116 ● BL

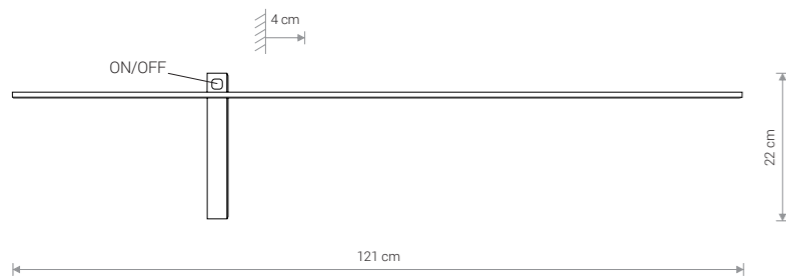
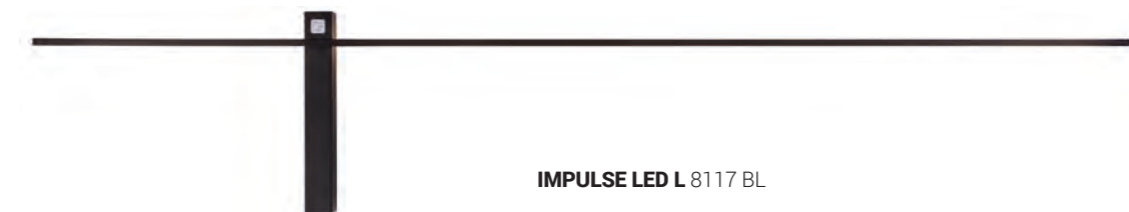


IMPULSE LED L

aluminium, PC / aluminium, PC / алюминий, PC

8117 ● BL


Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8115	6W	3000K	200 lm	120°	80	~220-230V, 50/60Hz	0,5	□	IP23	30 000h
8116	10W	3000K	350 lm	120°	80	~220-230V, 50/60Hz	0,5	□	IP23	30 000h
8117	15W	3000K	380 lm	120°	80	~220-230V, 50/60Hz	0,5	□	IP23	30 000h

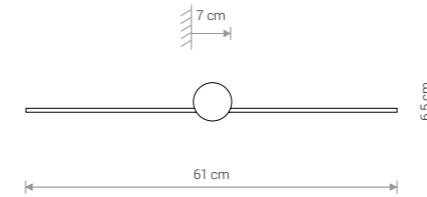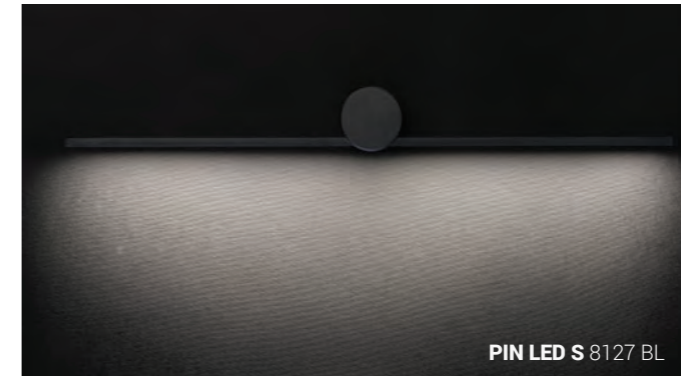

PIN LED S

aluminium, PC / aluminium, PC / алюминий, PC


8127 ● BL

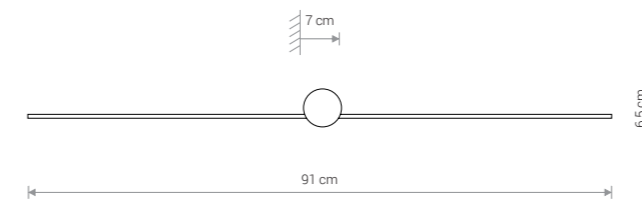

PIN LED M

aluminium, PC / aluminium, PC / алюминий, PC

8128 ● BL

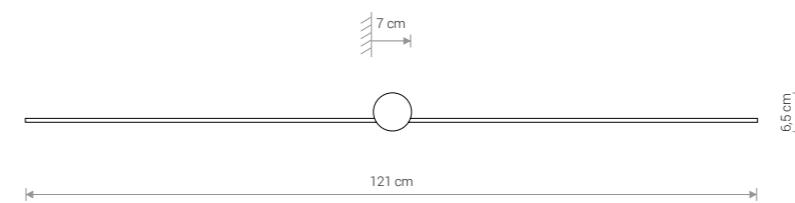

PIN LED L

aluminium, PC / aluminium, PC / алюминий, PC

8130 ● BL

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8127	6W	4000K	280 lm	120°	80	~220-230V, 50/60Hz	0,9	□	IP44	30 000h
8128	10W	4000K	500 lm	120°	80	~220-230V, 50/60Hz	0,9	□	IP44	30 000h
8130	15W	4000K	540 lm	120°	80	~220-230V, 50/60Hz	0,9	□	IP44	30 000h