




ELLIPSES LED 8140 WH



ELLIPSES LED 8182 BL



ELLIPSES LED 8181 BL/G




ELLIPSES LED

aluminium / aluminum / алюминий

8181 BL/G 8182 BL 8140 WH


| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8181 | 2x5W | 3000K | 600 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |
| 8182 | 2x5W | 3000K | 600 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |
| 8140 | 2x5W | 3000K | 600 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |

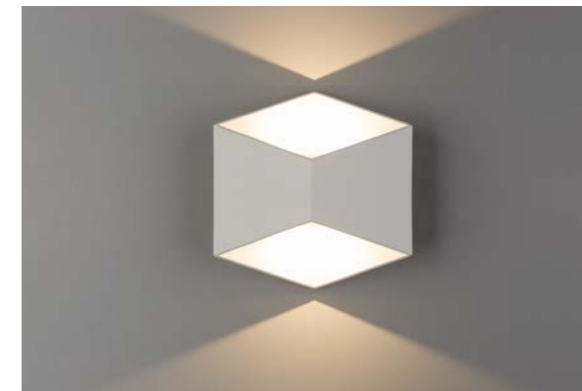


TRIANGLES LED 8143 WH



TRIANGLES LED 8142 BL

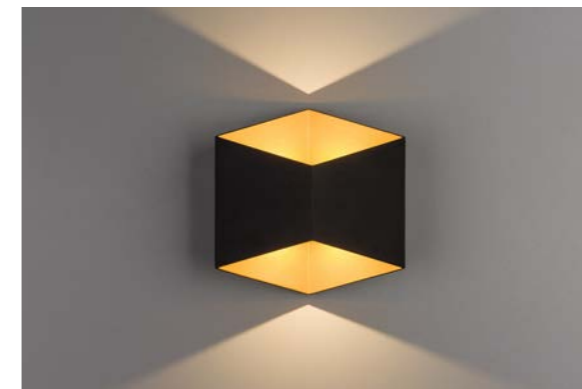

TRIANGLES LED 8141 BL/G

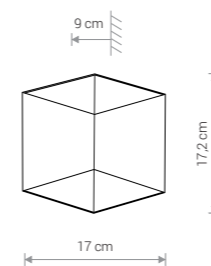

TRIANGLES LED

aluminium / aluminum / алюминий

8141 BL/G 8142 BL 8143 WH

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8141 | 2x5W | 3000K | 450 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |
| 8142 | 2x5W | 3000K | 450 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |
| 8143 | 2x5W | 3000K | 450 lm | 180° | 90 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 10 000h |