


### SIDEWALK ROUND LED

aluminium, PC / aluminium, PC / алюминий, PC


8147 ● BL

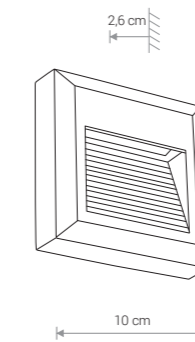

### SIDEWALK SQUARE LED

aluminium, PC / aluminium, PC / алюминий, PC


8148 ● BL

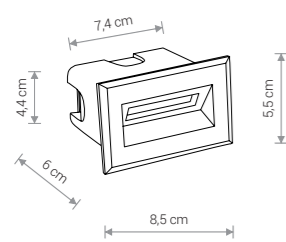

### BAY LED S

aluminium, PC / aluminium, PC / алюминий, PC

8164 ● BL

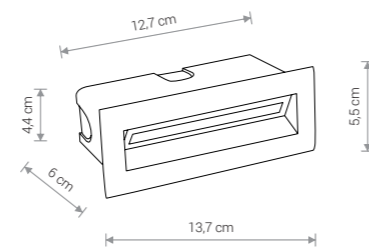

### BAY LED M

aluminium, PC / aluminium, PC / алюминий, PC

8165 ● BL

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8164	3W	3000K	220 lm	54°	80	~220-230V, 50/60Hz	0,5	⊕	IP65	10 000h
8165	5W	3000K	380 lm	51°	80	~220-230V, 50/60Hz	0,5	⊕	IP65	10 000h

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8147	1,6W	3000K	61 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP54	20 000h
8148	1,6W	3000K	61 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP54	20 000h