

06 Downlights Fixed LED&gt;The COB Downlight Range Die Cast

10107CA/W/C



7W LED recessed downlight, IP20. Ideal for general lighting applications.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

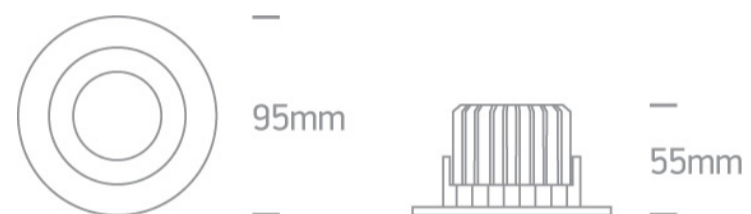

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The COB Downlight Range Die Cast

Order Code

10107CA/W/C

Colour

White

Material

Die Cast

Shape



Circular


Height

55mm


Diameter	95mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	21V
Safety Class	
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,9
Constant Current	Yes
300mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

## Illumination Data

Colour Temperature	4000K
Lumen Output	560lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	

## Packing Info

Box Length	12,5cm
Box Width	6cm
Box Height	10,5cm
Box Weight	0,240Kg
Pcs/Carton	50
Barcode	5291889051954
HS Code	9405409900

#### Certification & Warranty

Warranty	2 Years
Average Lifetime	30000hrs
Weee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

