


06 Downlights Fixed LED&gt;The 3-12W Round Recessed Panels Die cast

10108FA/B/C

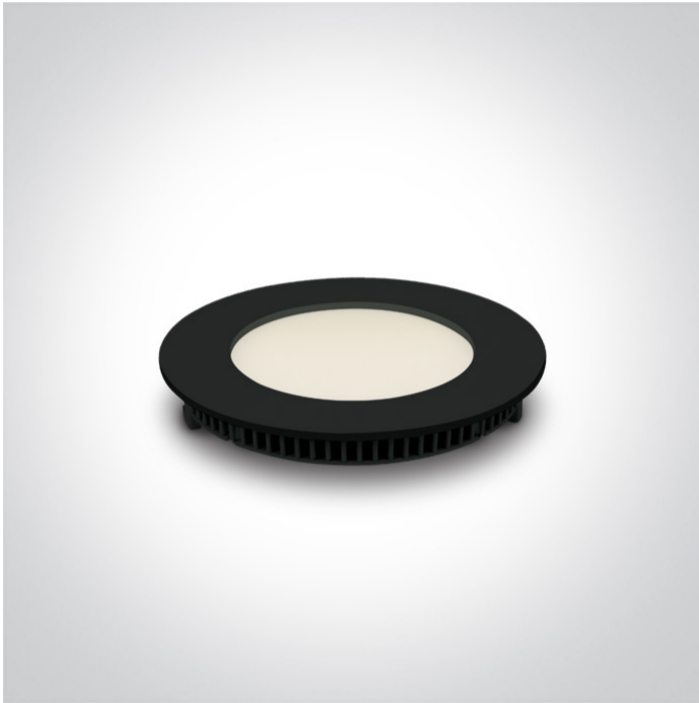

8W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Gallery



## Related items



89008UT

## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 3-12W Round Recessed Panels Die cast

Order Code

10108FA/B/C

Завантажено з mamadecor.ua

Colour

Black

Material

Die Cast

Diffuser Material

Acrylic

Shape

Circular

Height

22mm

Diameter

120mm

Cutout Hole Diameter

108mm

Recessed Ceiling

Yes

Depth Required

50mm

Indoor

Yes

Adjustable

No

#### Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

8W

IP Rating

IP40

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

23V



|              |              |
|--------------|--------------|
| Safety Class | III          |
| Power(Watts) | 6,9W         |
| IP Rating    | IP40         |
| Light Source | LED built in |
| LED Type     | SMD 2835     |
| LED Brand    | Epistar      |
| LED Number   | 42           |

## Gear

|                  |            |
|------------------|------------|
| Gear Type        | Led Driver |
| Input Voltage    | 220-240V   |
| 50 Hz            | Yes        |
| 60 Hz            | Yes        |
| Power(Watts)     | 4,2-7,2W   |
| Power Factor     | 0,6        |
| Constant Current | Yes        |
| Output           | 300mA      |
| Voltage Range    | 14-24V     |
| IP Rating        | IP20       |
| Safety Class     |            |
| Dimmable         | No         |
| Ambient Temp     | 50°C       |
| Operating Temp   | 75°C       |
| Housing Material | Plastic    |
| Brand            | Lifud      |

## Illumination Data

|                    |        |
|--------------------|--------|
| Colour Temperature | 4000K  |
| Lumen Output       | 560lm  |
| Light Efficiency   | 70lm/W |
| CRI                | 80     |

Beam Angle

120°

Завантажено з [mamadecor.ua](http://mamadecor.ua)

Illumination Diagram



## Packing Info

Box Length

18,5cm

Box Width

3,1cm

Box Height

13cm

Box Weight

0,250Kg

Pcs/Carton

40

Barcode

5291889052463

HS Code

9405109890

## Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

