

06 Downlights Fixed LED>The 3-12W Round Recessed Panels Die cast

10112FA/B/W

12W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 250mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

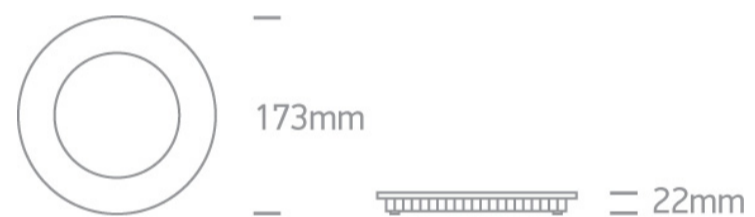

Gallery



Related items



89016UT

Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 3-12W Round Recessed Panels Die cast

Order Code

10112FA/B/W

Завантажено з mamadecor.ua

Colour

Black

Material

Die Cast

Diffuser Material

Acrylic

Shape

Circular

Height

22mm

Diameter

173mm

Cutout Hole Diameter

155mm

Recessed Ceiling

Yes

Depth Required

50mm

Indoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP40

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

320mA

Voltage

42V



Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number

10,5W

IP40

LED built in

SMD 2835

Epistar

60

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
250mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver

220-240V

Yes

Yes

6,75-10,5W

0,9

Yes

27-42V

IP20



No

50°C

75°C

Plastic

Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle

3000K

720lm

60lm/W

80

120°



Packing Info

Box Length	23,5cm
Box Width	3,1cm
Box Height	18cm
Box Weight	0,410Kg
Pcs/Carton	30
Barcode	5291889052470
HS Code	9405109890

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to
one light!

one
LIGHT

