

## 06 Downlights Fixed LED&gt;The IP54 Bathroom Downlights

10113B/W/C



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

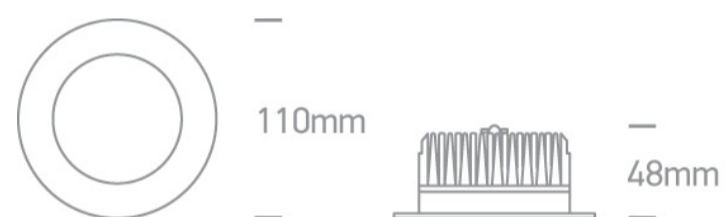

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10113B/W/C

Colour

White

Material

Die Cast

Diffuser Material



Plastic


Shape

Circular

Height	48mm
Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	
Power(Watts)	10,8W
IP Rating	IP54
Light Source	LED built in

LED Type

SMD 2835

Завантажено з mamadecor.ua

LED Brand

Epistar

LED Number

27

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

9-12W

Power Factor

0,9

Constant Current

Yes

Output

300mA

Voltage Range

30-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Cable

Brand

0

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

4000K

Lumen Output

950lm

Light Efficiency

73,07lm/W

CRI

80

Beam Angle

90°



## Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0,316Kg
Pcs/Carton	24
Barcode	5291889043218
HS Code	9405409900

## Certification &amp; Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

