

INSTALLATION MANUAL

10103FA, 10108FA, 10112FA, 10118FA, 10130FA

ecopanel




80
CRI




Complete with driver.

10103FA: 230V | SMD 2835 | 3W | IP40 | Die cast




10108FA: 230V | SMD 2835 | 8W | IP40 | Die cast




Optional dimmable driver code 89008UT.

10112FA: 230V | SMD 2835 | 12W | IP40 | Die cast




Optional dimmable driver code 89016UT.

10118FA: 230V | SMD 2835 | 18W | IP40 | Die cast




Optional dimmable driver code 89024UT.

10130FA: 230V | SMD 2835 | 30W | IP40 | Die cast



Optional dimmable driver code 89030UT.

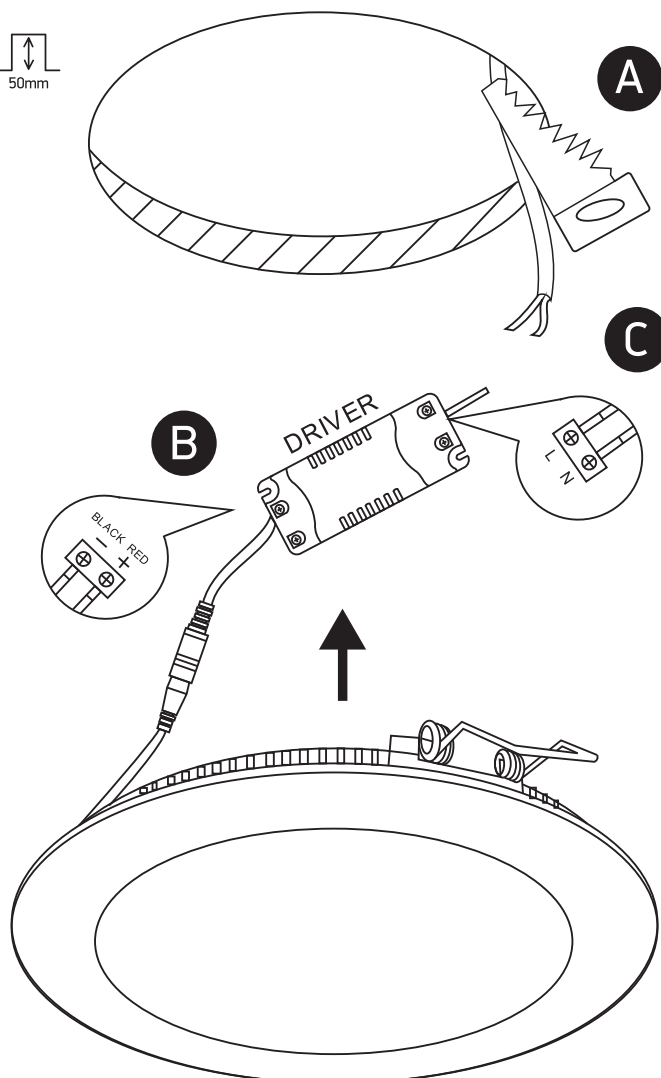

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.

