

06 Downlights Fixed LED>The COB Downlight Range Aluminium

10120C/G/C



20W COB LED recessed downlight, IP20.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

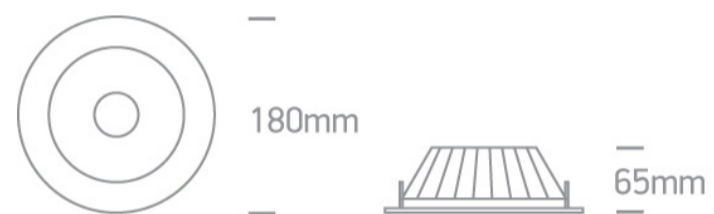

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10120C/G/C
Colour	Grey
Material	Aluminium
Shape	Circular
Height	65mm
Diameter	180mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

38V

Safety Class



Power(Watts)

19W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes

Yes

13,5-21W

0,8

Yes

27-42V

IP20



No

Plastic

Cable

Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K

1400lm

70lm/W

80

80°



Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

20cm

20cm

8cm

0,71kg

18

5291889040323

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

