

06 Downlights Fixed LED>The IP54 Bathroom Downlights

10125B/W/C



25W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

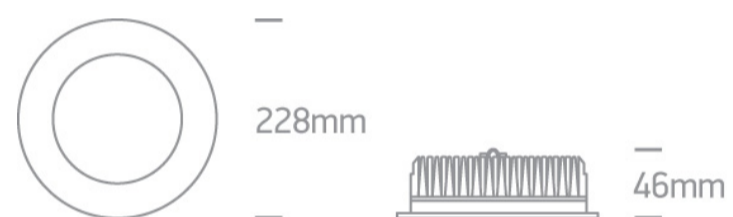

Gallery



Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10125B/W/C

Colour

White

Material

Die Cast

Diffuser Material



Plastic


Shape

Circular

Height	46mm
Diameter	228mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	720mA
Voltage	32V
Safety Class	
Power(Watts)	22,5W
IP Rating	IP54
Light Source	LED built in

LED Type

SMD 2835

Завантажено з mamadecor.ua

LED Brand

Epistar

LED Number

60

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

16,8-26,6W

Power Factor

0,9

Constant Current

Yes

Output

720mA

Voltage Range

24-38V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

70°C

Housing Material

Plastic

Output Terminal

Cable

Brand

0

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

4000K

Lumen Output

2000lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

90°



Packing Info

Box Length	26cm
Box Width	26cm
Box Height	7,5cm
Box Weight	1,2Kg
Pcs/Carton	10
Barcode	5291889043232
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to
one light!

one
LIGHT

