



INSTALLATION MANUAL


10130CF

ecodownlight80
CRI230V | SMD 4014 | 30W | IP65 | Die cast + opal diffuser
Complete with driver.195mm
50mm**one**
LIGHT

RECESSED INSTALLATION

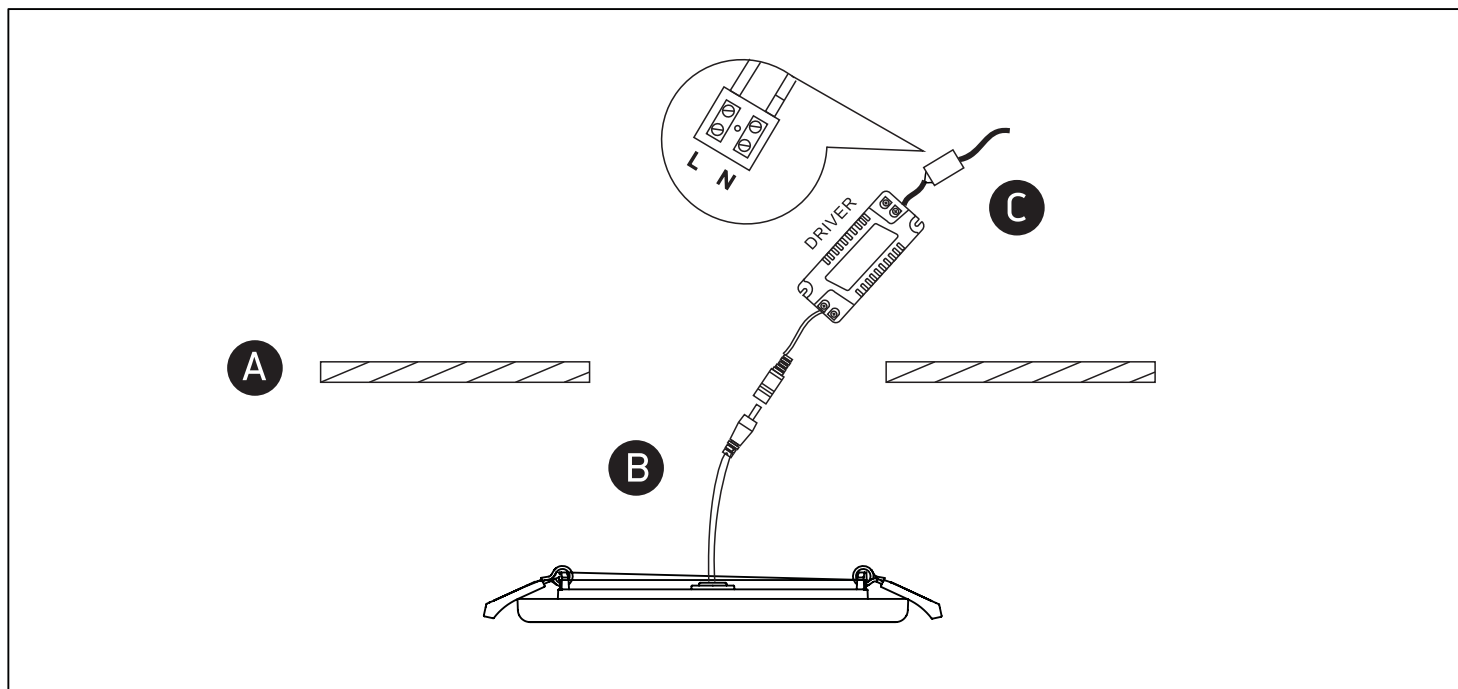

SURFACED INSTALLATION

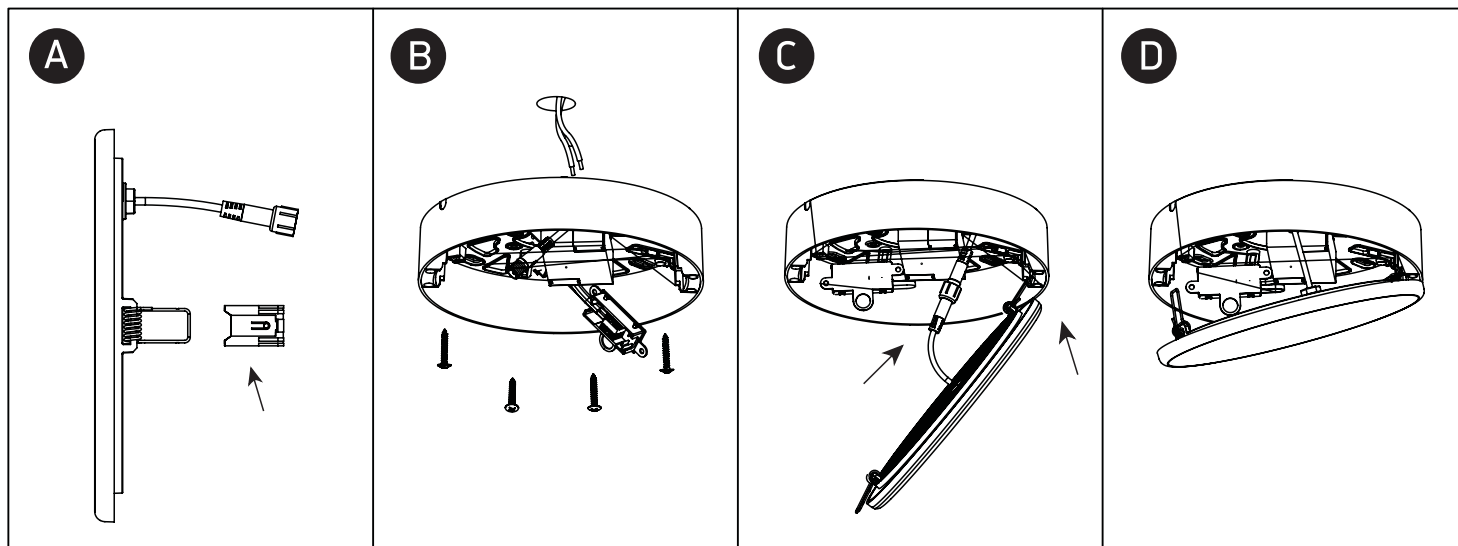

*IP65 is the protection degree for recessed installation. For surface installation is IP40.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.