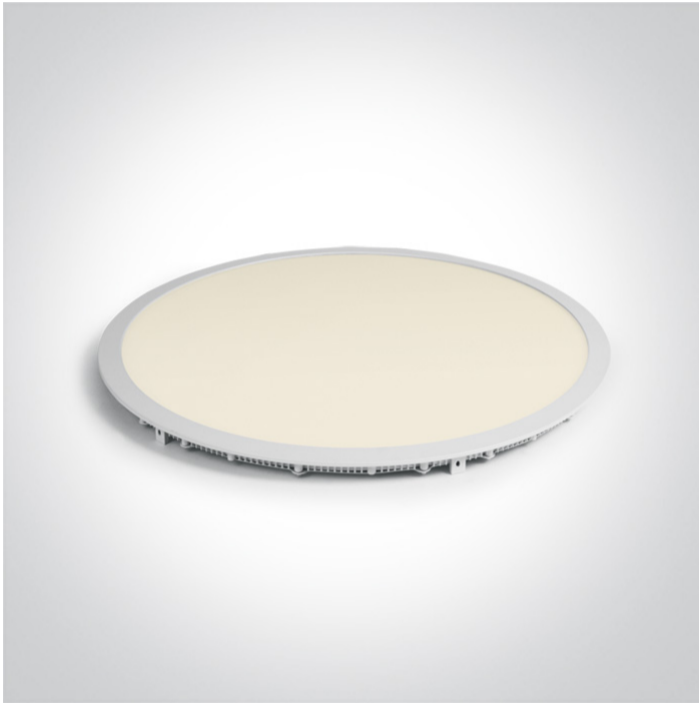


06 Downlights Fixed LED&gt;The 40-48W Round Recessed Panels Die Cast

**10148PE/W/W**

48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



Must be ordered separately



89048

## Related items



89048T



89050L



89050TLD

## Physical Specification

Item Group

06 Downlights Fixed LED

Family	The 40-48W Round Recessed Ceiling Light
Order Code	10148PE/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	20mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

## Fitting

Input Type	Constant Current
Input Current	1200mA
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

## Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm

Light Efficiency
CRI
Beam Angle
Illumination Diagram

72,91lm/W

80

120°



Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

72cm

65cm

4,5cm

3,3Kg

4

5291889041863

9405109890

Certification & Warranty

Warranty
Average Lifetime
Weee Directive

2 Years

30000 hours

Yes

switch to  
**one light!**

