

## 08 Downlights Adjustable LED&gt;The COB Extractable Range

## 11112F/W/C



12W LED adjustable COB Extractable Range, IP20.

Requires 700mA driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Gallery



## Must be ordered separately



89015A



89015AT

## Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Extractable Range
Order Code	11112F/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	96mm
Diameter	113mm
Cutout Hole Diameter	102mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

## Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Epistar

Завантажено з mamadecor.ua

Cable Length

40cm

F Mark



## Illumination Data

Colour Temperature

4000K

Lumen Output

1100lm

Light Efficiency

91,67lm/W

CRI

80

Beam Angle

50°

Illumination Diagram



## Packing Info

Box Length

12cm

Box Width

12cm

Box Height

10cm

Box Weight

0,425Kg

Pcs/Carton

36


Barcode

5291889048589

HS Code

9405409900

## Energy Label

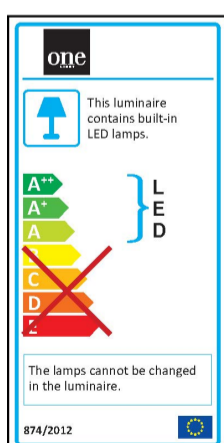

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

