

08 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11114R/W/W



14W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

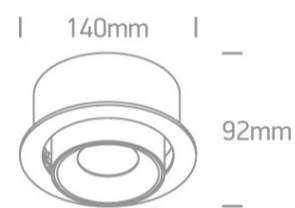

Gallery



Must be ordered separately



89015A



89015AT

Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11114R/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	92mm
Diameter	140mm
Cutout Hole Diameter	130mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	14W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Завантажено з mamadecor.ua

Cable Length

40cm

F Mark



Illumination Data

Colour Temperature

3000K

Lumen Output

1037lm

Light Efficiency

74,07lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



Packing Info

Box Length

20cm

Box Width

20cm

Box Height

15cm

Box Weight

1,15Kg

Pcs/Carton

12


Barcode

5291889046950

HS Code

9405409900

Energy Label

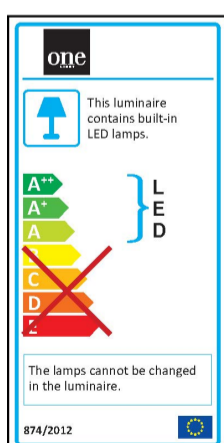

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

