

## 06 Downlights Fixed LED&gt;UGR19 Office Range

10110U/W/W



10W SMD LED UGR19 downlight, IP44.

Complete with 200mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

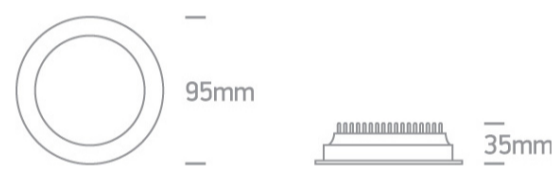

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

UGR19 Office Range

Order Code

10110U/W/W

Colour

White

Material

Die Cast

Shape



Circular

Height

35mm

Diameter	95mm
Cutout Hole Diameter	86mm
Recessed Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No
IK Rating	4

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	38V
Safety Class	
Power(Watts)	9,6W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand

Epistar

Завантажено з mamadecor.ua

F Mark



## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

5,4-8,4W

Power Factor

0,9

Constant Current

Yes

200mA

27-42V

IP Rating

IP44

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

3000K

Lumen Output

750lm

Light Efficiency

75lm/W

CRI

80

Illumination Diagram



UGR

19

## Packing Info

Pcs/Carton

40

Barcode

5291889065333

[Завантажено з mamadecor.ua](http://mamadecor.ua)

HS Code

9405409900

## Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

