



Product Datasheet

06 Downlights Fixed LED>Dark Light Pro Range Aluminium

10112ED/W/B/W



12W COB LED recessed downlight, for general lighting applications.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



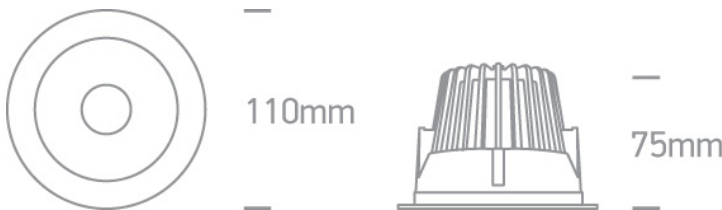

Dimensions





Physical Specification


Item Group	06 Downlights Fixed LED
Family	Dark Light Pro Range Aluminium
Order Code	10112ED/W/B/W
Colour	White-Black
Material	Aluminium
Shape	Circular
Height	75mm
Diameter	110mm
Cutout Hole Diameter	92mm
Recessed Ceiling	Yes
Depth Required	95mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	34,5V
Safety Class	
Power(Watts)	10,3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	1
F Mark	

Gear	
Gear Type	Led Driver

Input Voltage	220-240V	Завантажено з mamadecor.ua
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	7,5-12,6W	
Power Factor	0,5	
Constant Current	Yes	
300mA	25-42V	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Housing Material	Plastic	
Output Terminal	Cable	
Brand	LIFUD	

Illumination Data

Colour Temperature	3000K
Lumen Output	720lm
Light Efficiency	60lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	13cm
Box Width	13cm
Box Height	9cm
Pcs/Carton	50
Barcode	5291889058656
HS Code	9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

