

06 Downlights Fixed LED&gt;The 3-12W Round Recessed Panels Die cast

**10112FA/B/W**

12W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 250mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions

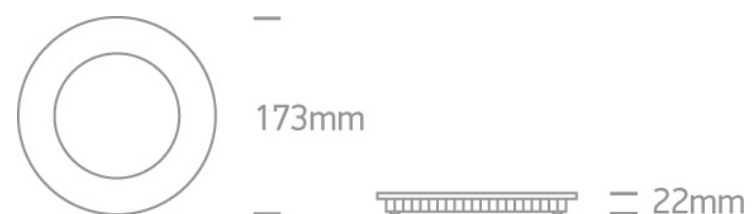

## Gallery



## Related items



89016UT

## Physical Specification

Item Group



06 Downlights Fixed LED

Family

The 3-12W Round Recessed Panels Die cast

Order Code	10112FA/B/W
Colour	Black
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	22mm
Diameter	173mm
Cutout Hole Diameter	155mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	320mA
Voltage	42V



Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number

10,5W

IP40

LED built in

SMD 2835

Epistar

60

## Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
250mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver

220-240V

Yes

Yes

6,75-10,5W

0,9

Yes

27-42V

IP20



No

50°C

75°C

Plastic

Lifud

## Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle

3000K

720lm

60lm/W

80

120°



## Packing Info

Box Length	23,5cm
Box Width	3,1cm
Box Height	18cm
Box Weight	0,410Kg
Pcs/Carton	30
Barcode	5291889052470
HS Code	9405109890

## Certification &amp; Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

