

## 06 Downlights Fixed LED&gt;The IP54 Bathroom Downlights

10113B/W/W



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

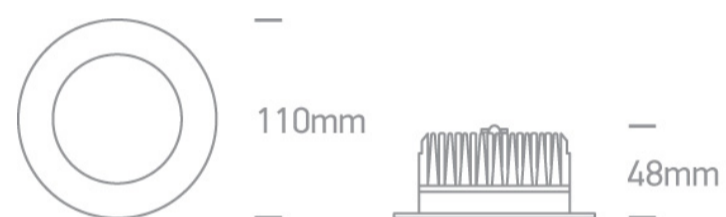

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10113B/W/W

Colour

White

Material

Die Cast

Diffuser Material



Plastic


Shape

Circular

Height	48mm
Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	
Power(Watts)	10,8W
IP Rating	IP54
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
LED Number	27
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9-12W
Power Factor	0,9
Constant Current	Yes
Output	300mA
Voltage Range	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
Brand	0
Protection	Short Circuit and Overload

## Illumination Data

Colour Temperature	3000K
Lumen Output	925lm
Light Efficiency	71,15lm/W
CRI	80
Beam Angle	90°



## Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0,316Kg
Pcs/Carton	24
Barcode	5291889043201
HS Code	9405409900

## Certification &amp; Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

