

02 Recessed Spots Fixed LED>The COB IP54 Range

10113P/AL/W



15W COB LED recessed spot, IP54, for general lighting applications.

Suitable for bathroom installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

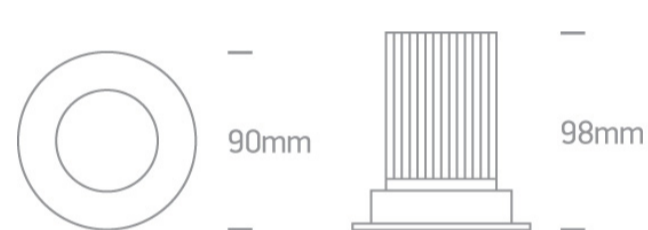

Gallery



Physical Specification

Item Group

02 Recessed Spots Fixed LED

Family

The COB IP54 Range

Order Code

10113P/AL/W

Colour

Aluminium

Material

Natural Aluminium

Shape



Circular

Height

98mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	20,4V
Safety Class	
Power(Watts)	14W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Завантажено з mamadecor.ua

LED Number

1

F Mark



Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

10-19,5W

Power Factor

0,9

Constant Current

Yes

700mA

17-28V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Brand

Eaglerise

Protection

0

Illumination Data

Colour Temperature

3000K

Lumen Output

1000lm

Light Efficiency

66,67lm/W

CRI

80

Beam Angle

50°

Illumination Diagram



Packing Info

Box Length

16cm

Box Width	13,5cm
Box Height	9,5cm
Box Weight	0,294kg
Pcs/Carton	30
Barcode	5291889032687
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

