

## 06 Downlights Fixed LED&gt;The COB Downlight Range Aluminium

## 10120C/G/C



20W COB LED recessed downlight, IP20.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

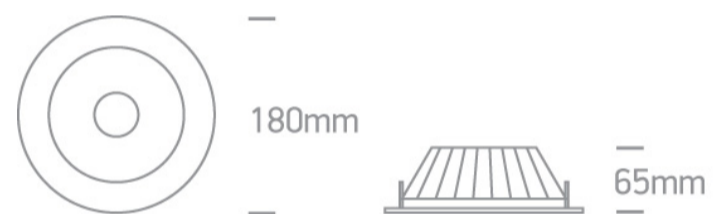

## Physical Specification

|                      |                                   |
|----------------------|-----------------------------------|
| Item Group           | 06 Downlights Fixed LED           |
| Family               | The COB Downlight Range Aluminium |
| Order Code           | 10120C/G/C                        |
| Colour               | Grey                              |
| Material             | Aluminium                         |
| Shape                | Circular                          |
| Height               | 65mm                              |
| Diameter             | 180mm                             |
| Cutout Hole Diameter | 160mm                             |
| Recessed Ceiling     | Yes                               |
| Depth Required       | 100mm                             |
| Indoor               | Yes                               |

## Electrical Characteristics

## Gear

## External-Included

## Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



## Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

38V

Safety Class



Power(Watts)

19W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark



## Gear

Gear Type

Led Driver

Input Voltage

220-240V

|                  |
|------------------|
| 50 Hz            |
| 60 Hz            |
| Power(Watts)     |
| Power Factor     |
| Constant Current |
| 500mA            |
| IP Rating        |
| Safety Class     |
| Dimmable         |
| Housing Material |
| Output Terminal  |
| Brand            |

Yes

Yes

13,5-21W

0,8

Yes

27-42V

IP20



No

Plastic

Cable

Lifud

### Illumination Data

|                      |
|----------------------|
| Colour Temperature   |
| Lumen Output         |
| Light Efficiency     |
| CRI                  |
| Beam Angle           |
| Illumination Diagram |

4000K

1400lm

70lm/W

80

80°



### Packing Info

|            |
|------------|
| Box Length |
| Box Width  |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode    |
| HS Code    |

20cm

20cm

8cm

0,71kg

18

5291889040323

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

