

21 Industrial &amp; Floodlights&gt;The IP65 LED Slim Range PC

38118LA/D



IP65 slim LED fitting .

Stainless steel clips included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

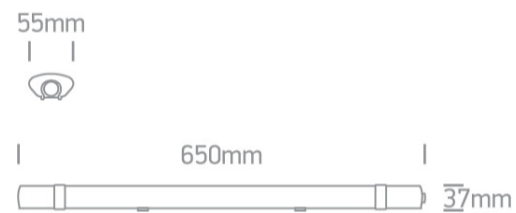

## Gallery



## Must be ordered separately




050084

## Physical Specification

Item Group	21 Industrial & Floodlights
Family	The IP65 LED Slim Range PC
Order Code	38118LA/D
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	650mm
Width	65mm
Height	37mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length

50cm

Завантажено з mamadecor.ua

F Mark



## Fitting

Input Type

Constant Current

Power(Watts)

18W

IP Rating

IP65

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

## Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

18W

Power Factor

0,9

Constant Current

Yes

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Connector

Brand

Eaglerise

## Illumination Data

Colour Temperature

6000K

Lumen Output

1600lm

Light Efficiency

88,9lm/W

CRI

80

Beam Angle

120°

Завантажено з [mamadecor.ua](http://mamadecor.ua)

Illumination Diagram



## Packing Info

Box Length

66cm

Box Width

9,5cm

Box Height

9,2cm

Box Weight

0,25Kg

Pcs/Carton

20

Barcode

5291889051107

HS Code

9405104090

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

