

21 Industrial & Floodlights>The IP65 LED Connectable Range Single

38136LC/C



IP65 slim LED connectable fitting .

Stainless steel clips included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

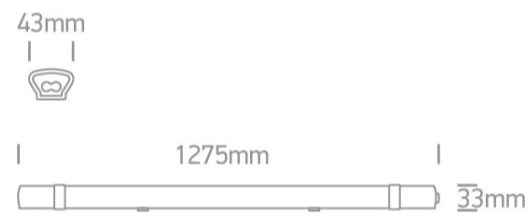

Gallery



Must be ordered separately





050084


Physical Specification

Item Group	21 Industrial & Floodlights
Family	The IP65 LED Connectable Range Single
Order Code	38136LC/C
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	1275mm
Width	43mm
Height	33mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	36W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	
Fitting	
Input Type	Constant Current
Power(Watts)	36W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	36W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	4000K
Lumen Output	3100lm
Light Efficiency	86,1lm/W
CRI	80

Beam Angle

120°

Завантажено з mamadecor.ua

Illumination Diagram



Packing Info

Pcs/Carton

20

Barcode

5291889055464

HS Code

9405104090

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

