


## 11 Office & Kitchen>Up & Down LED Linear Profiles

## 38140AU/W/W

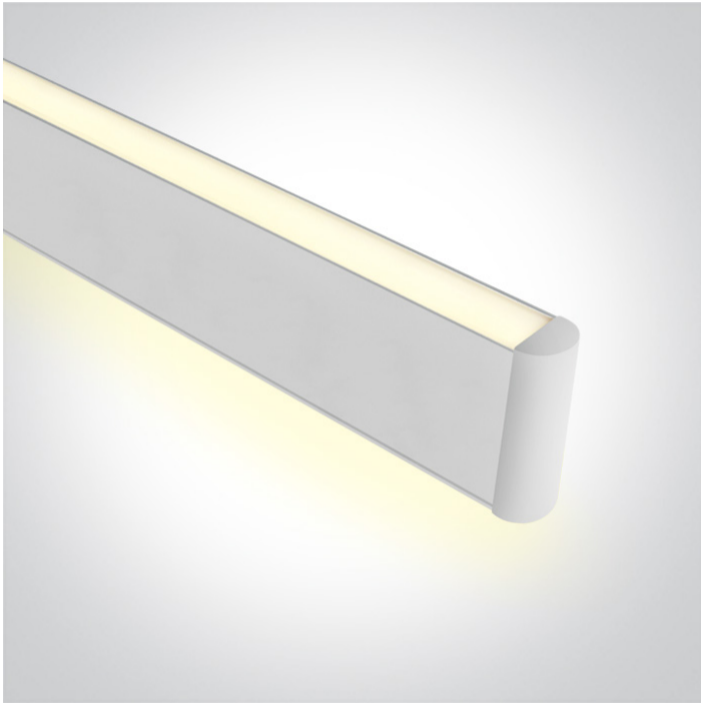

40W suspended linear diffuser with uplight, ideal for offices.

Complete with 900mA driver and 3m suspension kit.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

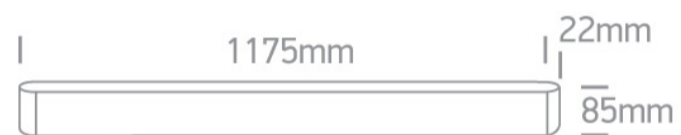

### Gallery



### Physical Specification

Item Group

11 Office & Kitchen

Family

Up & Down LED Linear Profiles

Order Code

38140AU/W/W

Colour

White

Material

Aluminium

Diffuser Material



Plastic

Shape

Rectangular

Length	1175mm
Width	22mm
Height	85mm
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	900mA
Voltage	40V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

27-38W

Power Factor

0,95

Constant Current

Yes

900mA

30-42V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Metal

Output Terminal

Connector

Brand

BOKE

## Illumination Data

Colour Temperature

3000K

Lumen Output

3600lm

Light Efficiency

90lm/W

CRI

90

Illumination Diagram



## Packing Info

Box Weight

2.058kg

Pcs/Carton

12

Barcode

5291889063919

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

