

## 04 Recessed Spots Adjustable LED&gt;The 7W COB Range

11107B/W/W



7W recessed adjustable spot LED. Suitable for residential and commercial applications, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

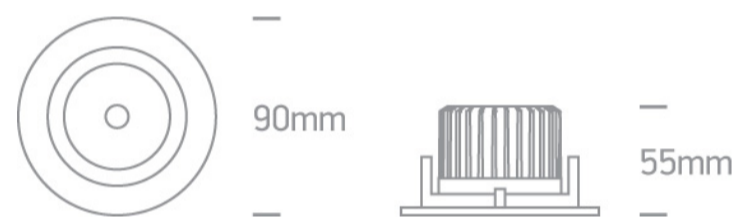

## Gallery



## Physical Specification

Item Group

04 Recessed Spots Adjustable LED

Family

The 7W COB Range

Order Code

11107B/W/W

Colour

White

Material

Die Cast

Shape



Circular

Height


55mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	1 Direction

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

## Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	21V
Safety Class	
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

LED Number

1

Завантажено з mamadecor.ua

F Mark



## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-7,2W

Power Factor

0,5

Constant Current

Yes

300mA

14-24V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

3000K

Lumen Output

560lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

60°

Illumination Diagram



## Packing Info

Box Length

12,5cm

Box Width	6cm
Box Height	11,5cm
Box Weight	0,225Kg
Pcs/Carton	50
Barcode	5291889052142
HS Code	9405409900

### Certification & Warranty

Warranty	3 Years
Average Lifetime	30000hrs
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

