


11 Office & Kitchen>Up & Down LED Linear Profiles

38140AU/B/W

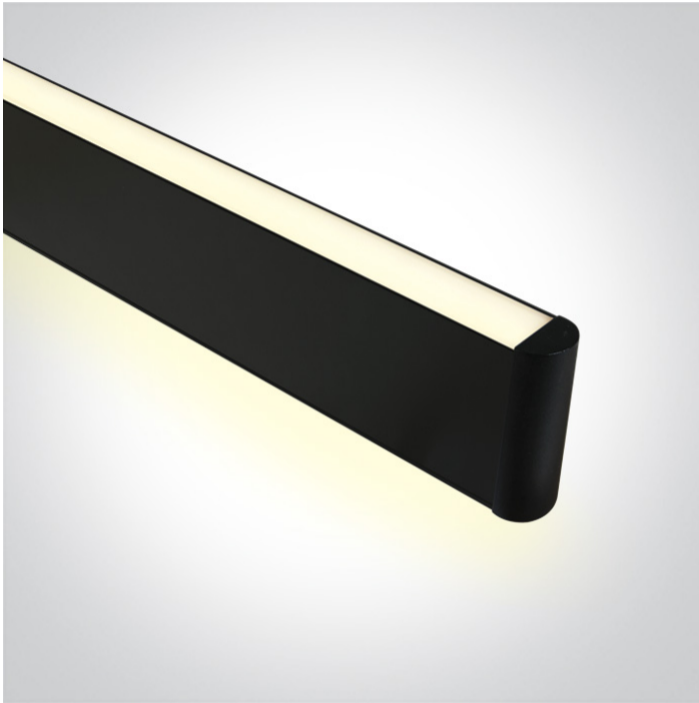

40W suspended linear diffuser with uplight, ideal for offices.

Complete with 900mA driver and 3m suspension kit.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

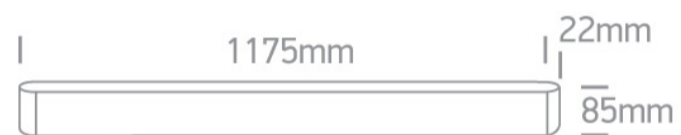

Gallery



Physical Specification

Item Group

11 Office & Kitchen

Family

Up & Down LED Linear Profiles

Order Code

38140AU/B/W

Colour

Black

Material

Aluminium

Diffuser Material



Plastic

Shape

Rectangular

| | |
|-------------------|--------|
| Length | 1175mm |
| Width | 22mm |
| Height | 85mm |
| Suspended Ceiling | Yes |
| Indoor | Yes |
| Adjustable | No |

Electrical Characteristics

| Gear | Built In |
|------------------|---|
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 40W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

| Fitting | |
|---------------|------------------|
| Input Type | Constant Current |
| Input Current | 900mA |
| Voltage | 40V |
| Power(Watts) | 36W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Epistar |

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

27-38W

Power Factor

0,95

Constant Current

Yes

900mA

30-42V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Metal

Output Terminal

Connector

Brand

BOKE

Illumination Data

Colour Temperature

3000K

Lumen Output

3600lm

Light Efficiency

90lm/W

CRI

90

Illumination Diagram



Packing Info

Box Weight

2.058kg

Pcs/Carton

12

Barcode

5291889063902

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

