

06 Downlights Fixed LED>The 40W Backlit Panel

50140B/W/C



60x60 recessed backlit LED panel for T-rail false ceilings. Uniform lighting, ideal for commercial applications.

Complete with 850mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

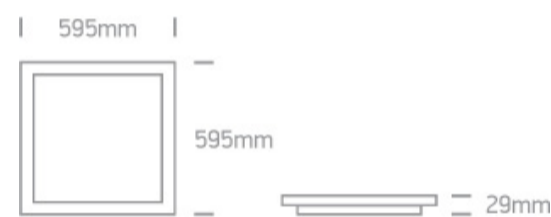

Gallery



Related items



050017



050108

Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 40W Backlit Panel

Order Code

50140B/W/C

Завантажено з mamadecor.ua

Colour

White

Material

Aluminium + Steel

Shape

Rectangular

Length

595mm

Width

595mm

Height

29mm

Recessed T-Ceiling

Yes

Depth Required

50mm

Indoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

40W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

850mA

Voltage


45V

Safety Class




| | |
|--------------|--------------|
| Power(Watts) | 38,7W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Samsung |

Gear

| | |
|------------------|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 32,3-38,25W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 850mA | 38-45V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Cable Length | 50cm |
| Brand | ONE |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 4000K |
| Lumen Output | 4000lm |
| Light Efficiency | 100lm/W |
| CRI | 80 |
| Beam Angle | 120° |
| Illumination Diagram |  |

| | |
|------------|---------------|
| Box Weight | 2.300kg |
| Pcs/Carton | 4 |
| Barcode | 5291889068334 |
| HS Code | 9405119090 |

Certification & Warranty

| | |
|----------------|---------|
| Warranty | 3 years |
| Weee Directive | Yes |

switch to
one light!

one
LIGHT

