


06 Downlights Fixed LED>The 48W Square Panels Aluminium

50148F/W/C

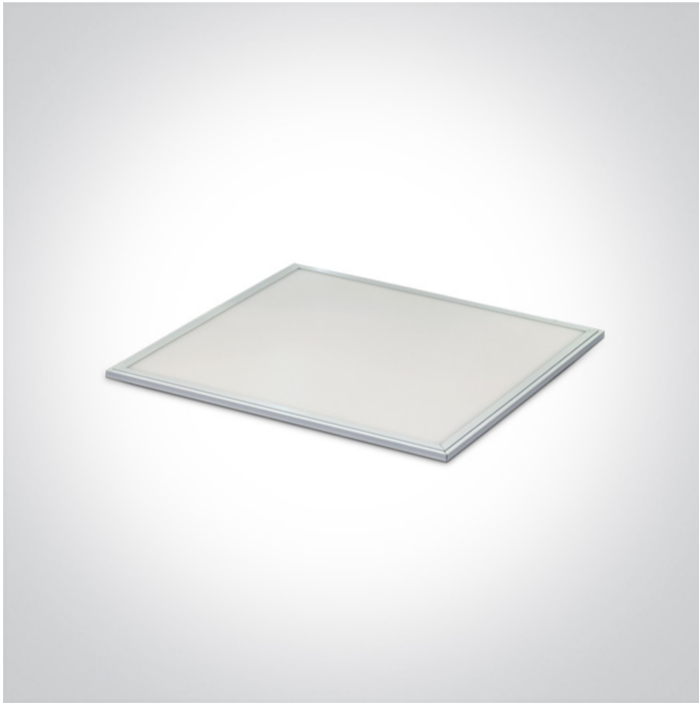

60x60 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with dimmable driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Related items



89050L



89050TLD

Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 48W Square Panels Aluminium

Order Code

50148F/W/C

Завантажено з mamadecor.ua

Colour

White

Material

Aluminium

Diffuser Material

Acrylic

Shape

Rectangular

Length

595mm

Width

595mm

Height

20mm

Recessed T-Ceiling

Yes

Depth Required

50mm

Indoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

48W

IP Rating

IP20

Light Source

LED built in

Dimmable

Yes

Dimmer type

Triac

F Mark



Fitting

Input Type

Constant Current

Input Current

1200mA



Safety Class	III
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	32,4-50,4W
Power Factor	0.9
Constant Current	Yes
1200mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	Yes
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	3800lm
Light Efficiency	79,167lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Pcs/Carton

2

Завантажено з mamadecor.ua


Barcode

5291889034889

HS Code

9405109890

Energy Label

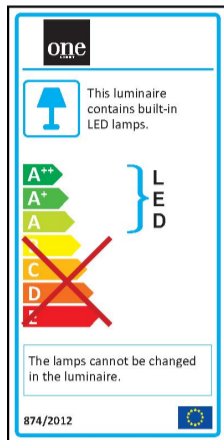

Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to
one light!

one
LIGHT

