

21 Industrial & Floodlights>The Industrial LED High Bay Aluminium

63100E/C



SMD LED Industrial High Bay, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery



Physical Specification

Item Group

21 Industrial & Floodlights

Family

The Industrial LED High Bay Aluminium

Order Code

63100E/C

Colour

Black

Material

Aluminium

Shape

Circular

Height

272mm

Diameter	360mm
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
------	----------

Fitting + Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	100W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	2700mA
Voltage	36
Power(Watts)	97,2W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 3030
LED Brand	Osram

Gear

Gear Type	Led Driver
-----------	------------

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	75-97,2W
Power Factor	0,9
Constant Current	Yes
Output	2700mA
Voltage Range	21-36V
IP Rating	IP20
Safety Class	


Illumination Data

Colour Temperature	4000K
Lumen Output	10000lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	100°
Illumination Diagram	

Packing Info

Box Weight	3,1Kg
Pcs/Carton	4
Barcode	5291889046318
HS Code	9405409900

Energy Label

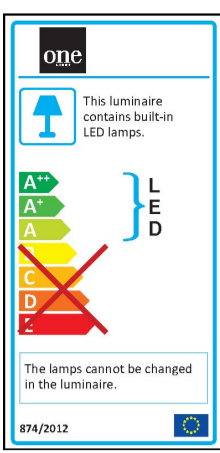

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

