


## **Product Datasheet**

www.1-light.eu

04 Recessed Spots Adjustable LED>The COB Adjustable Spots

### 51110A/AL/C

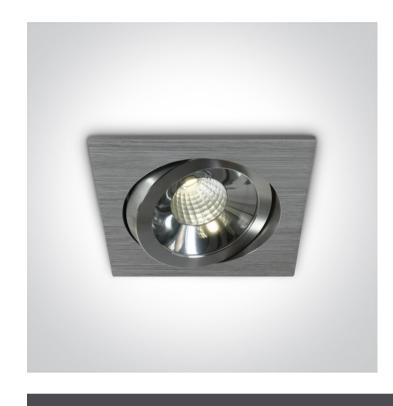

COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



#### Downloads










#### Dimensions

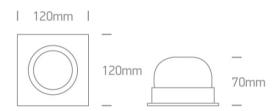

#### Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Adjustable Spots
Order Code	51110A/AL/C
Colour	Aluminium
Material	Aluminium
Shape	Rectangular
Length	120mm
Width	120mm
Height	70mm
Cutout Hole Diameter	100mm
Recessed Ceiling	Yes
Depth Required	100mm

Indoor	Yes Завантажено з mamadecor.ua
Adjustable	1 Direction
ectrical Characteristics	
Gear	External-Included
Geal	
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	250mA
Voltage	38V
Safety Class	
Power(Watts)	9,5W
IP Rating	IP20
Light Source	LED built in
LED Brand	Citizen
LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	100-240V Завантажено з mamadecor.ua
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-10W
Power Factor	0,9
Constant Current	Yes
250mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
Illumination Data	
	4000K
Colour Temperature	4000K 840lm
Colour Temperature  Lumen Output	840lm
Colour Temperature  Lumen Output  Light Efficiency	840lm 84lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	840lm 84lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	840lm 84lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	840lm 84lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	840lm 84lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	840lm 84lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width	840lm 84lm/W 80 36°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length	840lm  84lm/W  80  36°  15cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width	840lm 84lm/W 80 36°  15cm 14cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height	840lm 84lm/VV 80 36°  15cm 14cm 9,5cm

Warranty	2 Years
Weee Directive	Yes

# switch to one light!

