

07 Downlights Adjustable LED>The COB Shop Downlights Pro Die cast

51125A/W/W

25W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

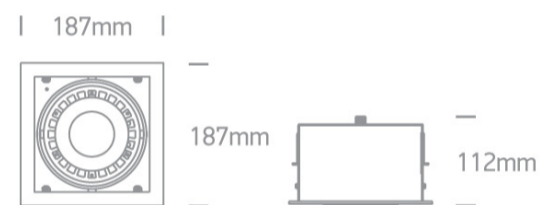

Gallery



Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The COB Shop Downlights Pro Die cast

Order Code

51125A/W/W

Colour

White

Material

Die Cast

Shape



Rectangular


Length

187mm

Width	187mm
Height	112mm
Cutout Hole Width	165mm
Cutout Hole Length	165mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	35V
Safety Class	
Power(Watts)	24,5W
IP Rating	IP20
Light Source	LED built in

LED Type

COB

Завантажено з mamadecor.ua

LED Brand

Epistar

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

19,6-30,4W

Power Factor

0,9

Constant Current

Yes

700mA

28-43V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

70°C

Operating Temp

40°C

Housing Material

Plastic

Brand

Lifud

Illumination Data

Colour Temperature

3000K

Lumen Output

2300lm

Light Efficiency

92lm/W

CRI

80

Beam Angle

40°

Illumination Diagram



Packing Info

Box Length

20,5cm

Box Width	19,5cm
Box Height	13,5cm
Box Weight	1,9kg
Pcs/Carton	8
Barcode	5291889039402
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

