

14 Plafo>The LED Slim Plafo Range Round

67366/W/W



12W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

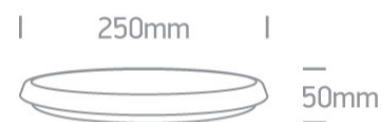

Physical Specification

| | |
|-----------------|--------------------------------|
| Item Group | 14 Plafo |
| Family | The LED Slim Plafo Range Round |
| Order Code | 67366/W/W |
| Colour | White |
| Material | PC |
| Shape | Circular |
| Height | 50mm |
| Diameter | 250mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

160mA

Voltage

70V

Power(Watts)

11,2W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark



Gear

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz

Yes

| | |
|------------------|---|
| 60 Hz | Yes |
| Power(Watts) | 12W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| Output | 160mA |
| Voltage Range | 70V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 900lm |
| Light Efficiency | 75lm/W |
| CRI | 80 |
| Beam Angle | 120° |
| Illumination Diagram |  |

Packing Info

| | |
|---------------|---------|
| Box Length | 26cm |
| Box Width | 26cm |
| Box Height | 5,7cm |
| Box Weight | 0.805kg |
| Pcs/Carton | 20 |
| Carton Length | 60cm |
| Carton Width | 54cm |
| Carton Height | 29cm |
| Carton Weight | 15,5Kg |

Barcode

5291889043034

[Завантажено з mamadecor.ua](http://mamadecor.ua)

HS Code

9405114090

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

