

21 Industrial & Floodlights>The LED Park Light Die cast

70104/G/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads





Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The LED Park Light Die cast
Order Code	70104/G/C
Colour	Grey
Material	Die Cast
Shape	Circular
Height	605mm
Diameter	450mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	950mA
Voltage	30V
Power(Watts)	28,5W
IP Rating	IP65
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25,6-34W
Power Factor	0,9

Constant Current	Yes
950mA	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	2700lm
Light Efficiency	90lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	12,5Kg
Pcs/Carton	1
Barcode	5291889035572
HS Code	9405409900

Energy Label

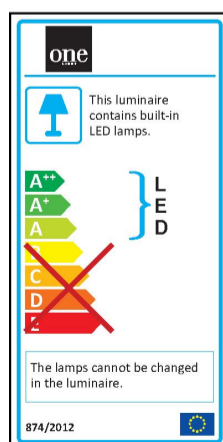

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

